


The European Cement Research Academy (ECRA) Chair was established at UMONS in 2013, focusing on the CO<sub>2</sub> capture & reuse applied to the cement industry.

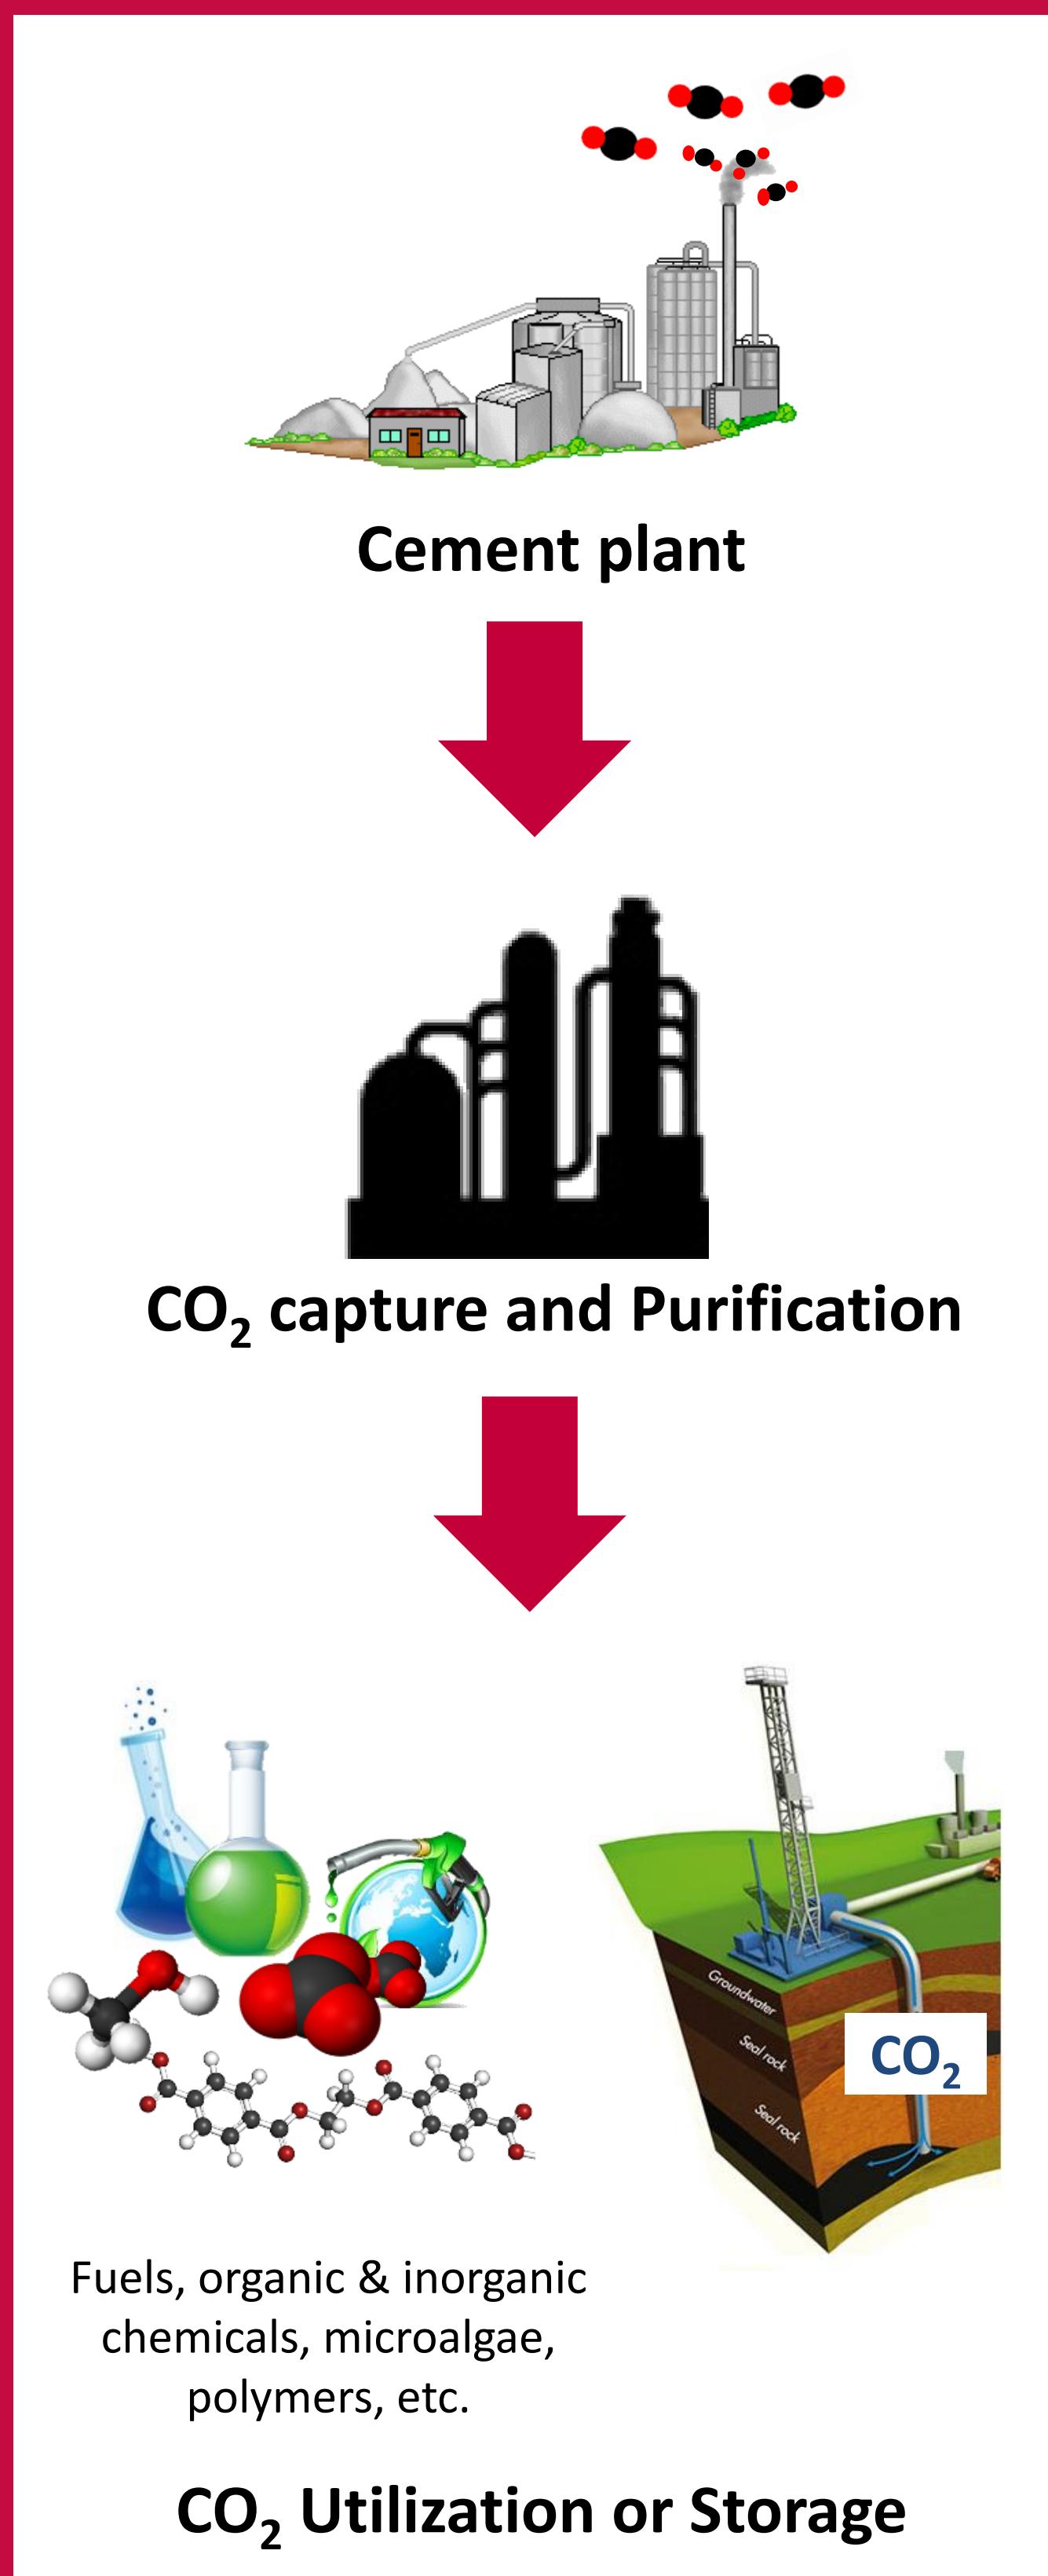

**Authors:**  
**Lionel Dubois, Sinda Laribi, Seloua Mouhoubi, Nicolas Meunier, Remi Chauvy, Guy De Weireld, Diane Thomas**  
 Chemical & Biochemical Process Engineering, Thermodynamics Units Faculty of Engineering - University of Mons, 20 Place du Parc - 7000 Mons Belgium

**Contact person:** Diane Thomas  
[diane.thomas@umons.ac.be](mailto:diane.thomas@umons.ac.be)

**For more information:**  
<http://hosting.umons.ac.be/html/ecrachair>

**Partners:**



# From CO<sub>2</sub> to Energy: Carbon Capture in Cement Production and its Re-use

## KEY CONCLUSIONS



- Processes optimization and integration are required to lower energy and resources consumption
- Economic viability of CCU processes are highly dependent on the assumptions (e.g. price of electricity)
- CO<sub>2</sub> reduction may be possible only if renewable energy use as input
- Mitigation potential of CCU to methanol represents 50% of the original emissions of a reference system without CCU

## RESULTS

### CO<sub>2</sub> Capture

**CO<sub>2</sub> Capture:** Three ways were highlighted for the decrease ( $\downarrow$ ) of the energy consumption and the cost of CO<sub>2</sub> capture for the application to cement flue gases:

1. Partial O<sub>2</sub>-combustion to increase ( $\uparrow$ ) flue gas CO<sub>2</sub> content:  $\downarrow$  by 26% of E<sub>regen</sub> if y<sub>CO<sub>2</sub></sub>  $\uparrow$  to 44%
2. Advanced process configurations:  $\downarrow$  by 35% of E<sub>regen</sub> with solvent MDEA-PZ + RVC + IC
3. Use of demixing solvents for  $\downarrow$  the regen. flow rate:  $\downarrow$  by 40% of E<sub>regen</sub> (in progress)

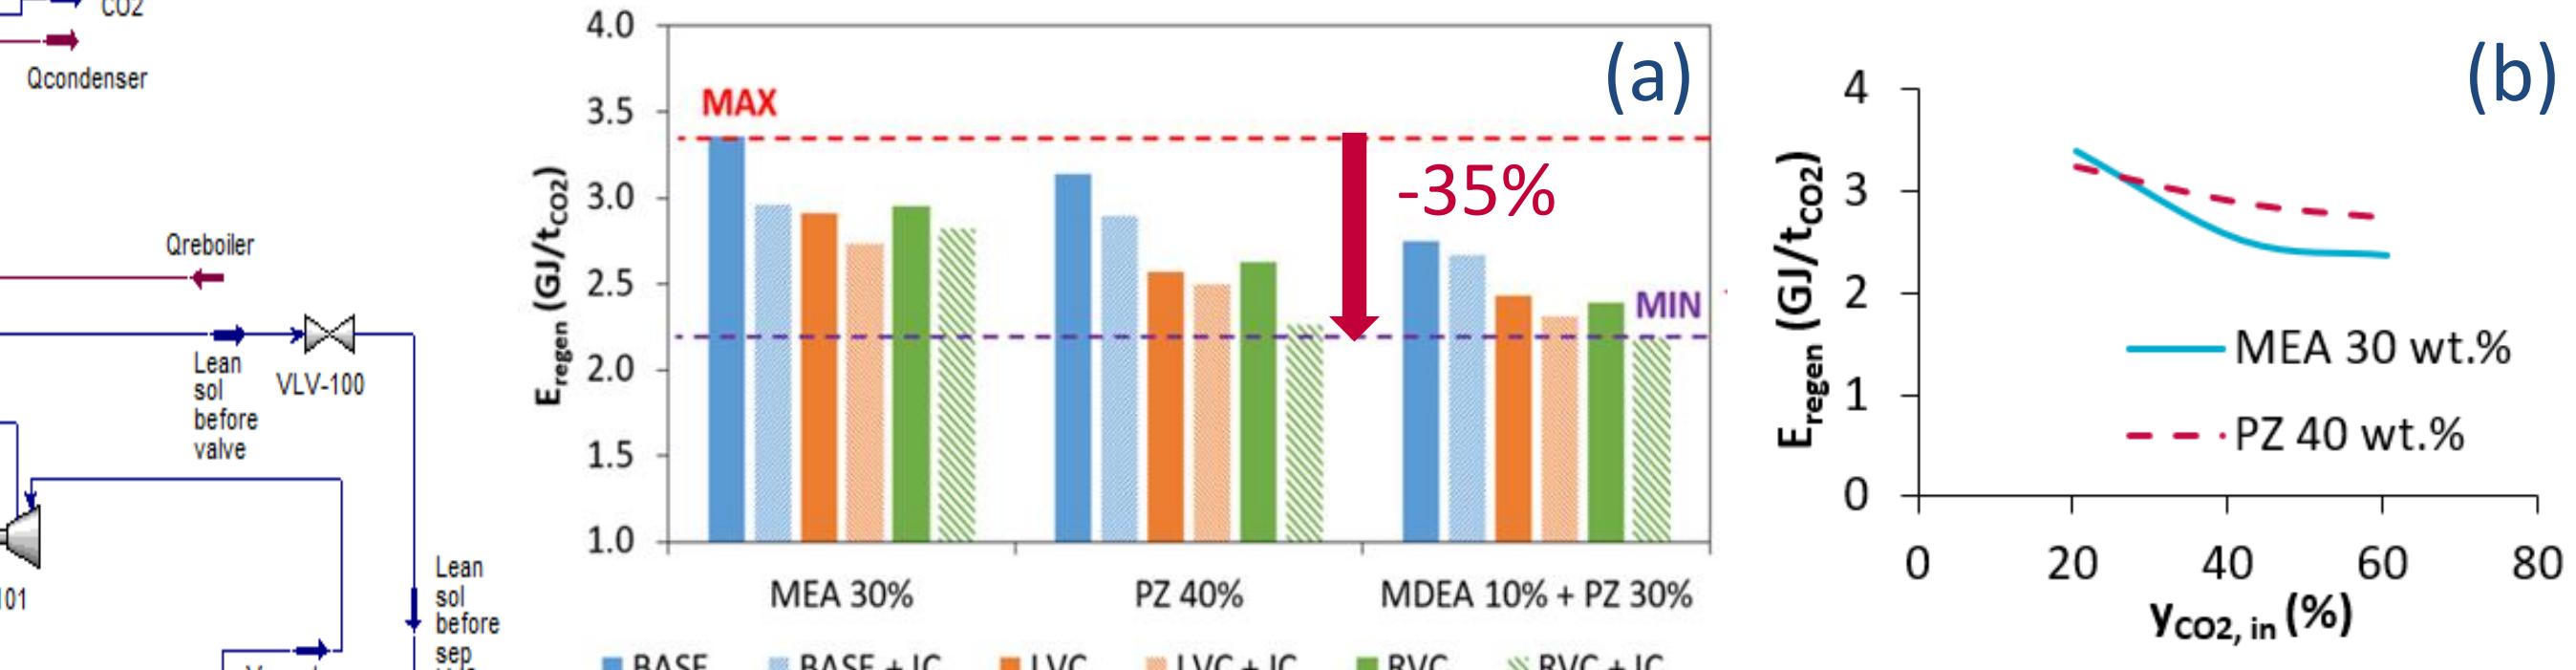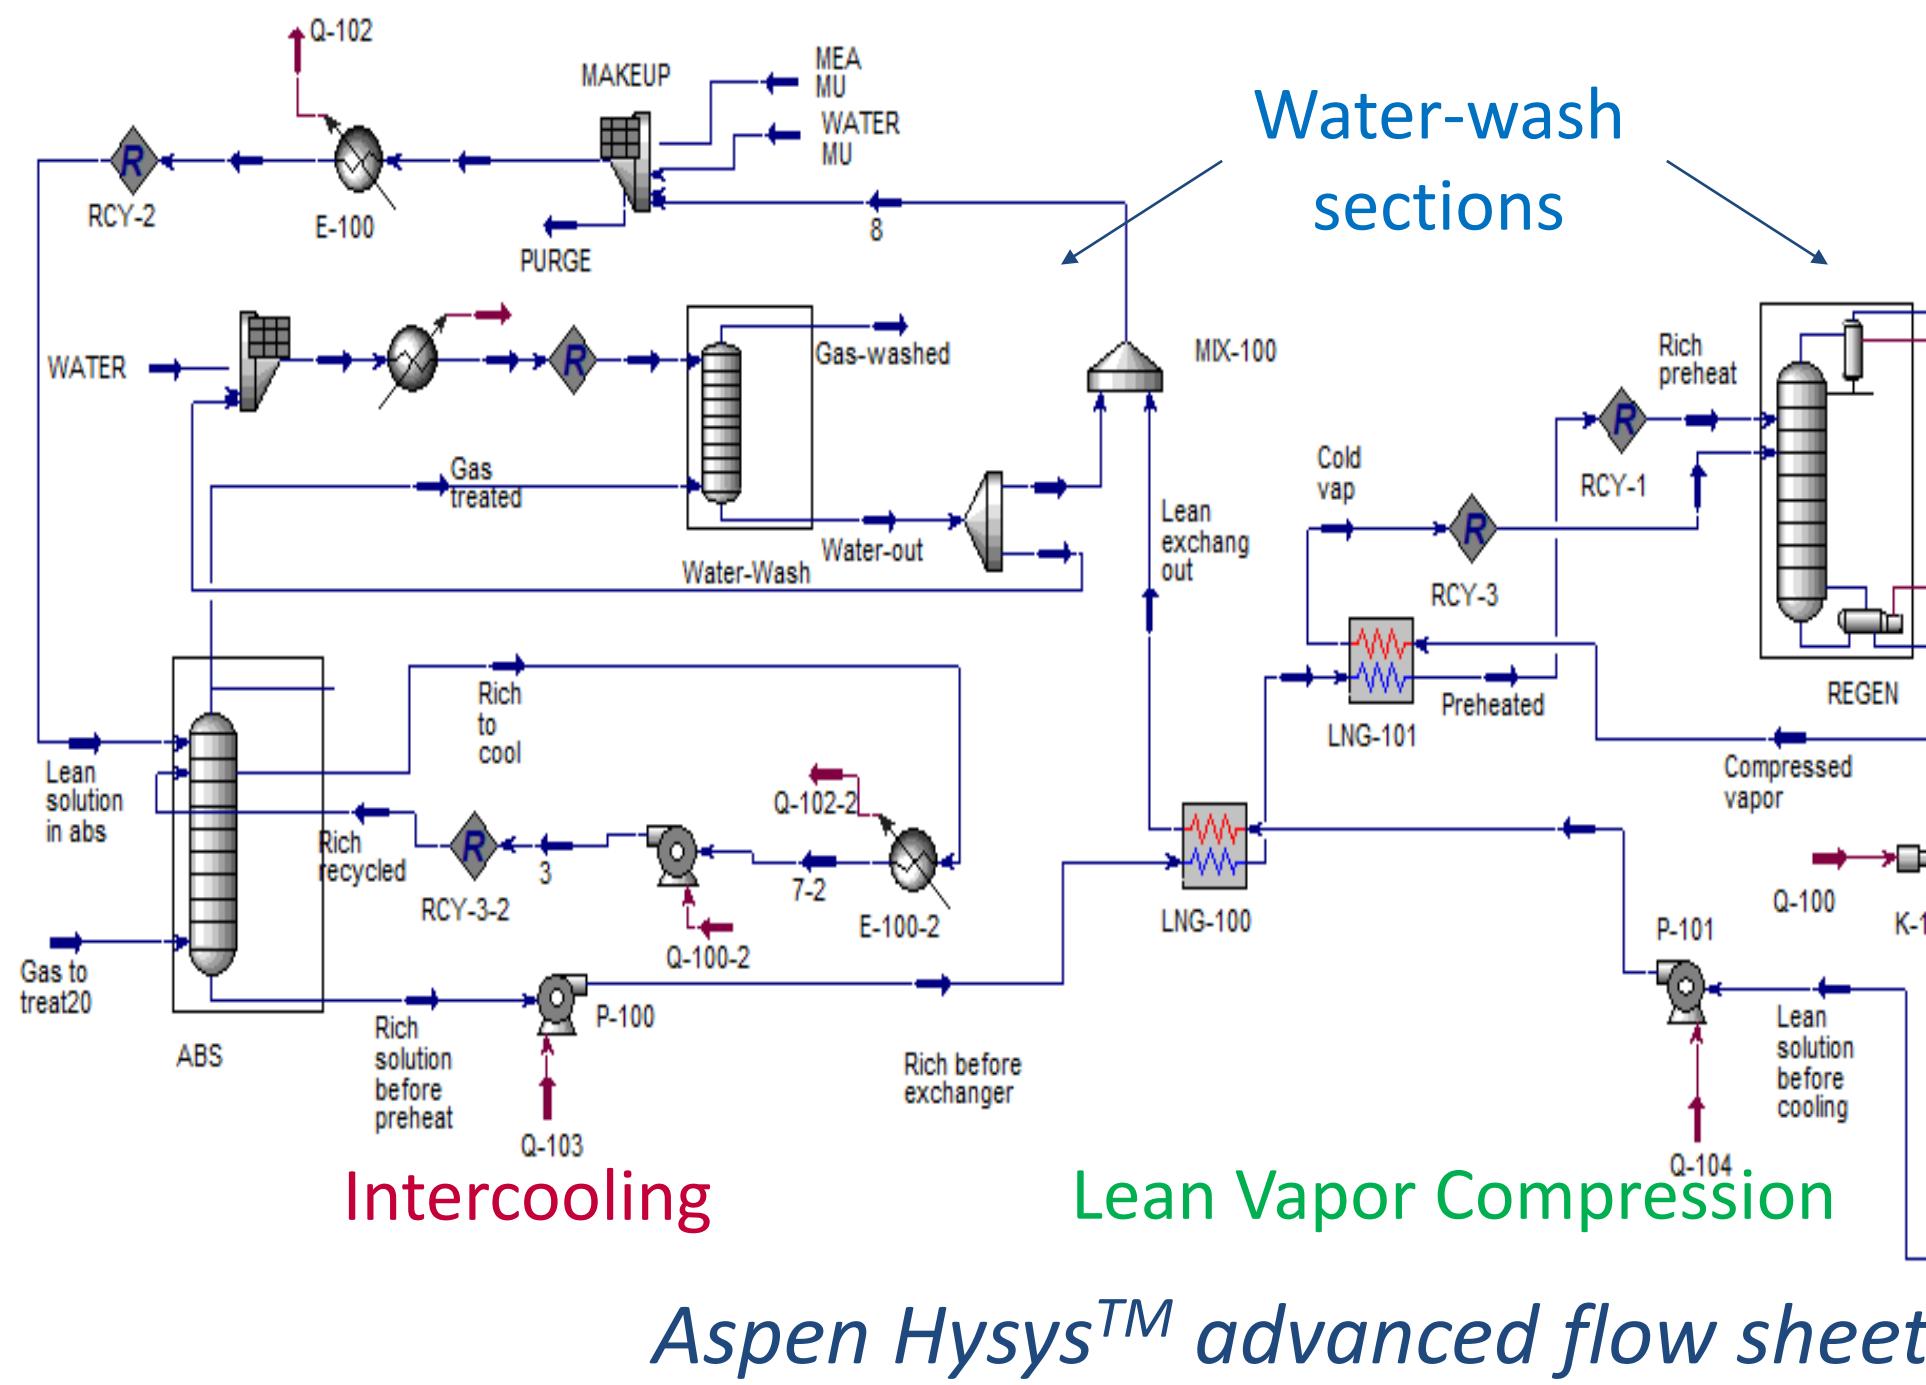



Energy savings thanks to:

(a) Alternative configurations - (b) Partial O<sub>2</sub>-combustion

### CO<sub>2</sub> Purification

**CO<sub>2</sub> Purification:** Efficiency of Sour Compression Unit (SCU) De-SOx/De-NOx process Absorption into pressurized water (15-30 bar) → From 2-column to 1-column process

Optimized process → CAPEX: 20-25 M€ & OPEX: 6-8 €/t<sub>CO<sub>2</sub></sub>, treated

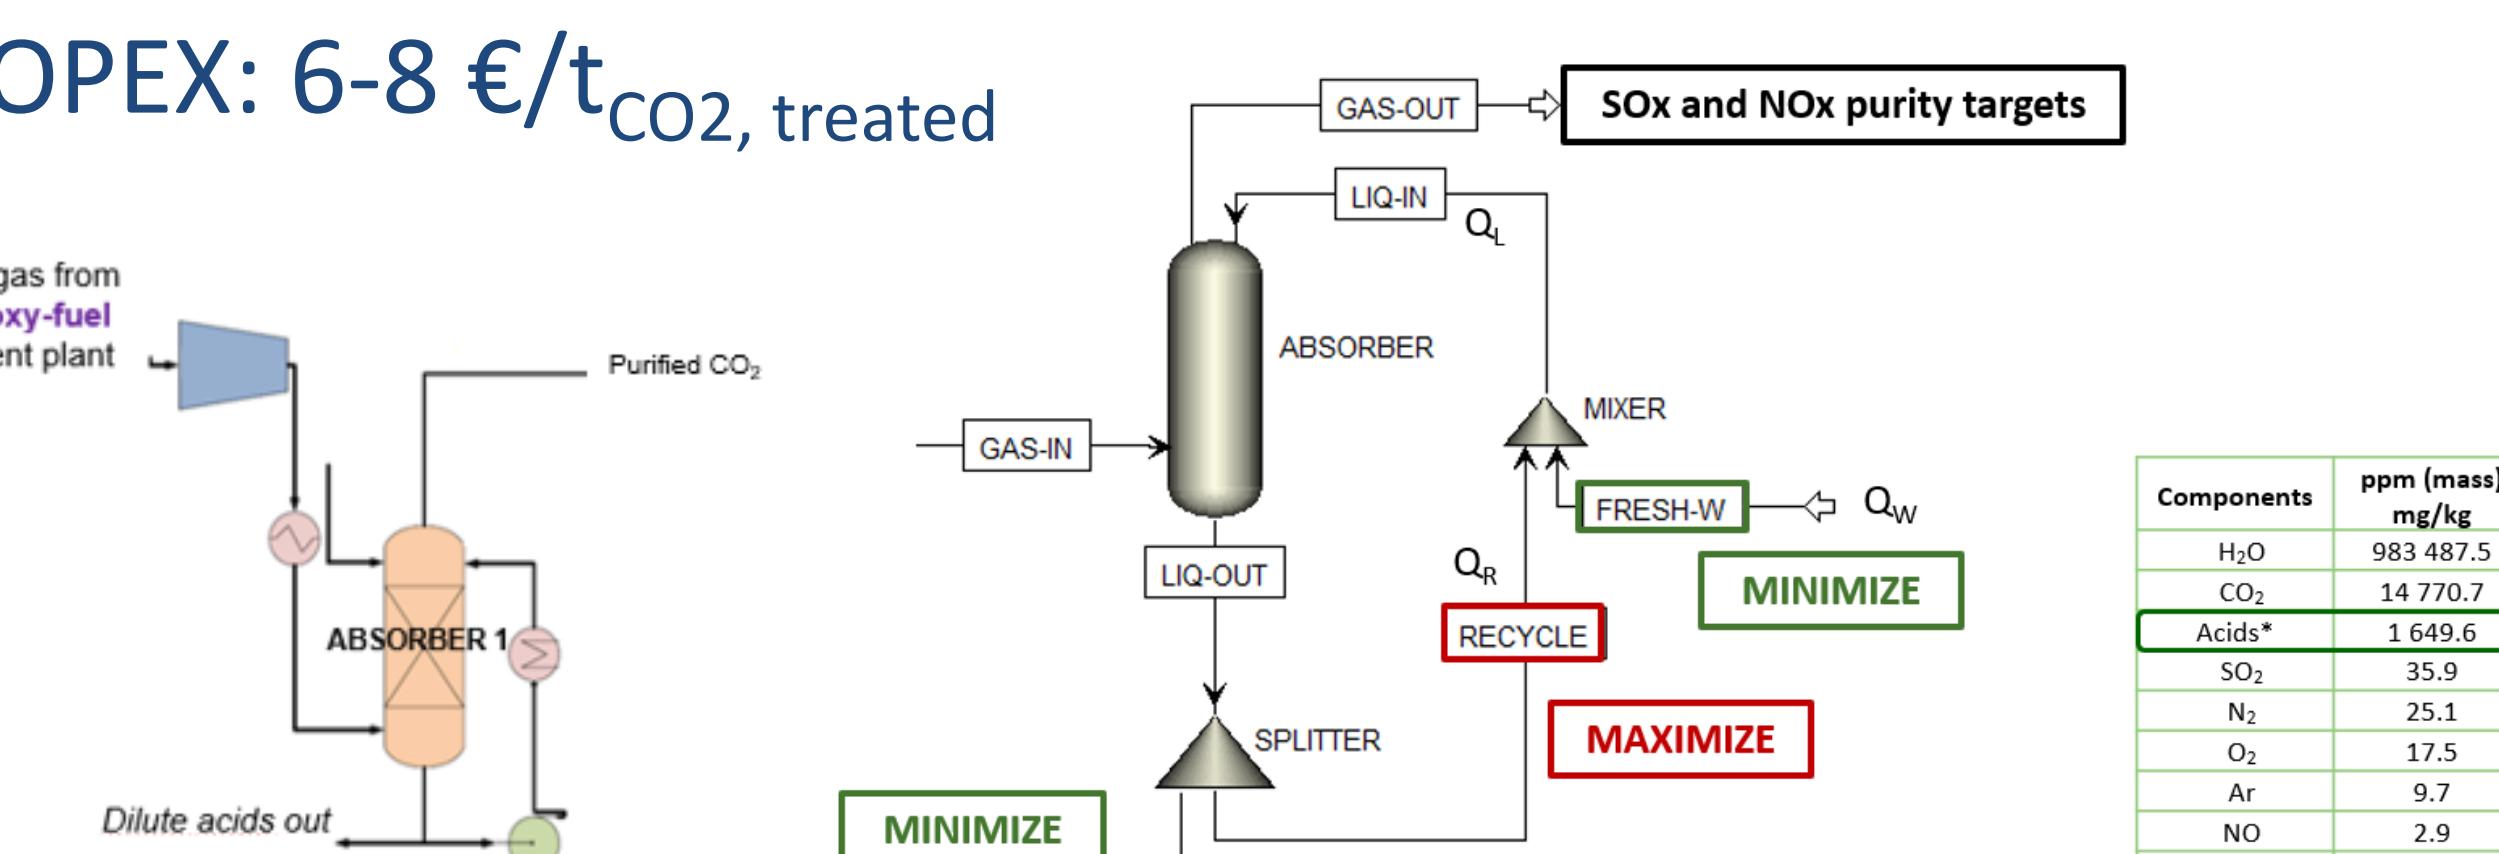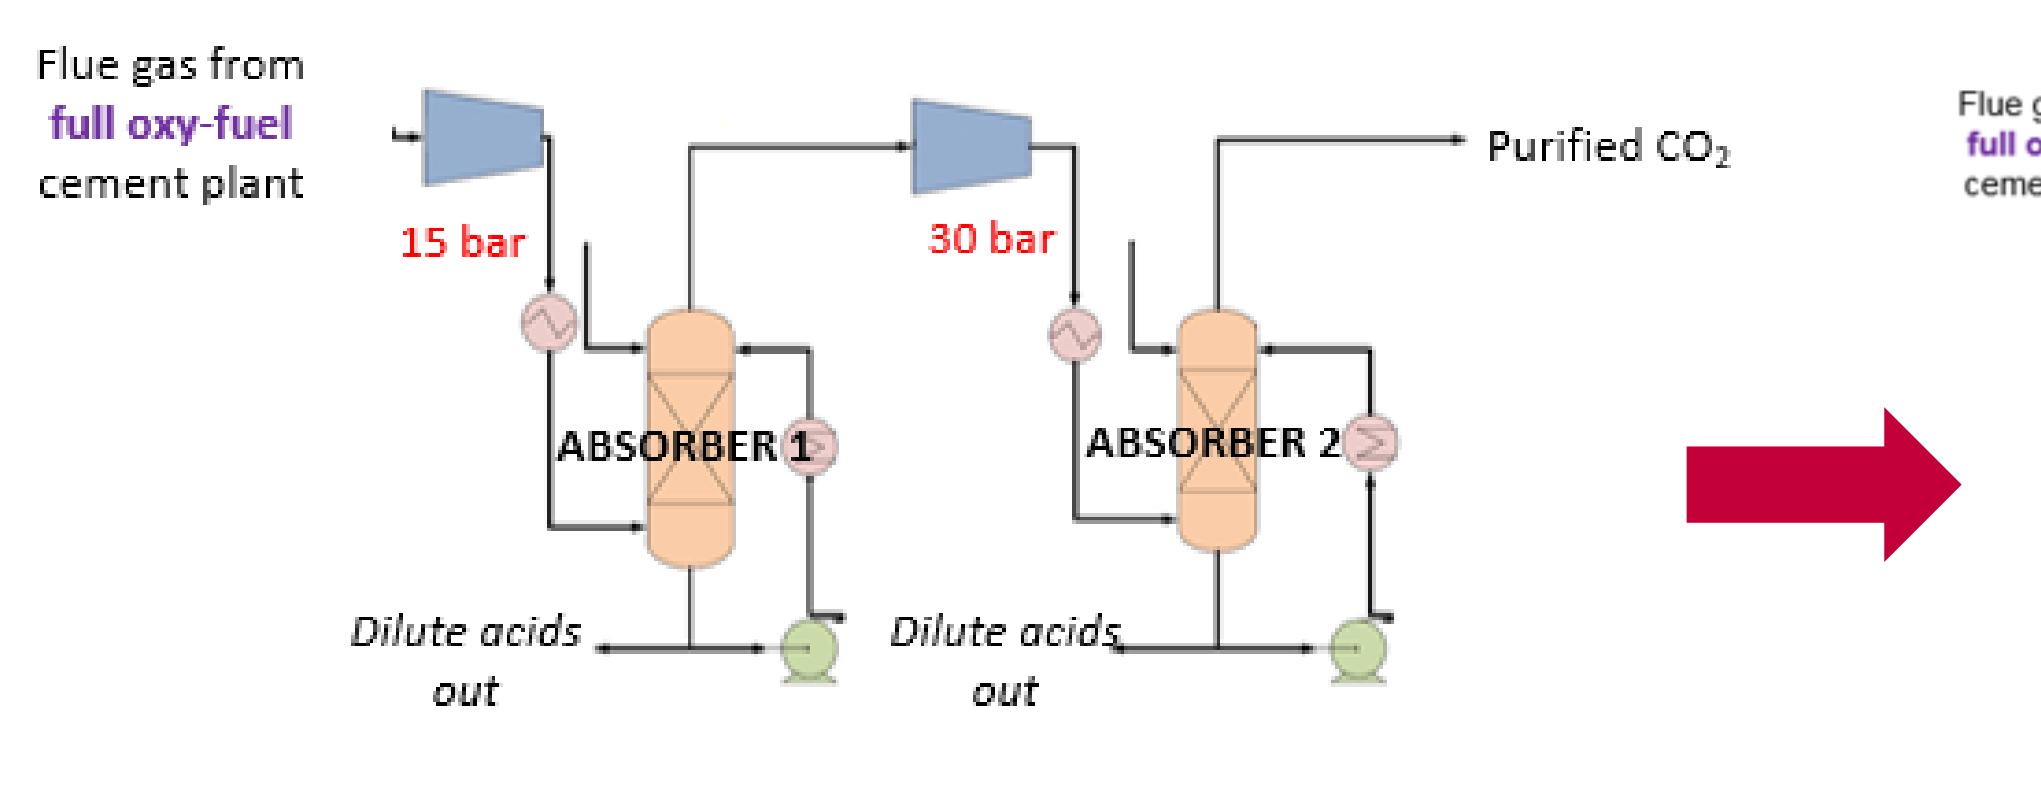

### CO<sub>2</sub> Conversion

**CO<sub>2</sub> Conversion:** Identification of the most interesting CO<sub>2</sub>-based conversion pathways

Methanol; Methane ; Dimethyl carbonates ; Calcium carbonates ;  $\mu$ -algae

CO<sub>2</sub> conversion into methanol: global chain was simulated and optimized including energy integration with the CO<sub>2</sub> capture → CAPEX: 60 M€ & OPEX: 90 €/t<sub>CO<sub>2</sub></sub>

Environmental study: maximum reduction by 50% of CO<sub>2</sub> emissions

