

As Soon as Possible but Rationally


Véronique Bruyère ✉ 🏠 

Université de Mons (UMONS), Belgium

Christophe Grandmont ✉ 🏠 

Université de Mons (UMONS), Belgium

Université Libre de Bruxelles (ULB), Belgium

Jean-François Raskin ✉ 🏠 

Université Libre de Bruxelles (ULB), Belgium

Abstract

This paper addresses complexity problems in rational verification and synthesis for multi-player games played on weighted graphs, where the objective of each player is to minimize the cost of reaching a specific set of target vertices. In these games, one player, referred to as the system, declares his strategy upfront. The other players, composing the environment, then rationally make their moves according to their objectives. The rational behavior of these responding players is captured through two models: they opt for strategies that either represent a Nash equilibrium or lead to a play with a Pareto-optimal cost tuple.

2012 ACM Subject Classification Software and its engineering → Formal methods; Theory of computation → Solution concepts in game theory; Theory of computation → Logic and verification

Keywords and phrases Games played on graphs, rational verification, rational synthesis, Nash equilibrium, Pareto-optimality, quantitative reachability objectives

1 Introduction

Nowadays, formal methods play a crucial role in ensuring the reliability of critical computer systems. Still, the application of formal methods on a large scale remains elusive in certain areas, notably in multi-agent systems. Those systems pose a significant challenge for formal verification and automatic synthesis because of their heterogeneous nature, encompassing everything from conventional reactive code segments to fully autonomous robots and even human operators. Crafting formal models that accurately represent the varied components within these systems is often a too complex task.

Although constructing detailed operational models for humans or sophisticated autonomous robots might be problematic, it is often more feasible to identify the *overarching goals* that those agents pursue. Incorporating these goals is crucial in the design and validation process of systems that interact with such entities. Typically, a system is not expected to function flawlessly under all conditions but rather in scenarios where the agents it interacts with act in alignment with their objectives, i.e., they *behave rationally*. *Rational synthesis* focuses on creating a system that meets its specifications against any behavior of environmental agents that is guided by their goals (and not against any of their behaviors). *Rational verification* studies the problem of ensuring that a system enforces certain correctness properties, not in all conceivable scenarios, but specifically in scenarios where environmental agents behave in accordance with their objectives.

Rationality can be modeled in various ways. In this paper, we focus on two general approaches. The first approach comes from game theory where rationality is modeled by the concept of equilibrium, such as *Nash equilibria* (NE) [39] or *subgame perfect equilibria* (SPE), a refinement of NEs [40]. The second approach treats the environment as a single agent but with multiple, sometimes conflicting, goals, aiming for behaviors that achieve a *Pareto-optimal* balance among these objectives. The concept of Pareto-optimality (PO) and its application

■ **Table 1** Summary of complexity results.

	Non-coop. verif.	Universal non-coop. verif.	Coop. synthesis	Non-coop. synthesis
PO, weights	Π_2^P -complete	PSPACE-complete	PSPACE-complete	NEXPTIME-complete [11]
PO, qualitative	Π_2^P -complete	PSPACE-complete	PSPACE-complete	NEXPTIME-complete [18]
NE, weights	coNP-complete	coNP-complete	NP-complete	Unknown, EXPTIME-hard ¹⁾
NE, qualitative	coNP-complete [28]	coNP-complete [28]	NP-complete [21]	PSPACE-complete [21]

1) For the important special case of one-player environments, we provide an algorithm that runs in EXPTIME and we can prove PSPACE-hardness. The EXPTIME-hardness of the general case already holds for two-player environments.

in multi-objective analysis have been explored primarily in the field of optimization [41], but also in formal methods [2, 4]. These two notions of rationality are different in nature: in the first setting, each component of the environment playing an equilibrium is considered to be an independent selfish individual, excluding cooperation scenarios, while in the second setting, several components of the environment can collaborate and agree on trade-offs. The challenge lies in adapting these concepts to *reactive systems* characterized by ongoing, non-terminating interactions with their environment. This necessitates the transition from two-player zero-sum games on graphs, the classical approach used to model a fully adversarial environment (see e.g. [42]), to the more complex setting of *multi-player non zero-sum games on graphs* used to model environments composed of various rational agents.

Rational synthesis and rational verification have attracted large attention recently, see e.g. [7, 19, 21, 26, 29, 30, 36, 37]. But the results obtained so far, with a few exceptions that we detail below, are limited to the *qualitative* setting formalized as Boolean outcomes associated with ω -regular objectives. Those objectives are either specified using linear temporal specifications or automata over infinite words (like parity automata). The complexity of those problems is now well understood (with only a few complexity gaps remaining, see e.g. [21, 37]). The methods to solve those problems and get completeness results for worst-case complexity are either based on automata theory (using mainly automata over infinite trees) or by reduction to zero-sum games. *Quantitative* objectives are less studied and revealed to be much more challenging. For instance, it is only very recently that the rational verification problem was studied, for SPEs in non zero-sum games with mean-payoff, energy, and discounted-sum objectives in [7], for an LTL specification in multi-agent systems that behave according to an NE with mean-payoff objectives in [30] or with quantitative probabilistic LTL objectives in [31]. In [1], the rational synthesis problem was studied for the quantitative extension $LTL[\mathcal{F}]$ of LTL where the Boolean operators are replaced with arbitrary functions mapping binary tuples into the interval $[0, 1]$.

In this paper, we consider *quantitative reachability* objectives. Our choice for studying these objectives was guided by their fundamental nature and also by their relative simplicity. Nevertheless, as we will see, they are challenging for both rational synthesis and rational verification. Indeed, to obtain worst-case optimal algorithms and establish completeness results, we had to resort to the use of *innovative* theoretical tools, more advanced than those necessary for the qualitative framework. In our endeavor, we have established the exact complexity of most studied decision problems in rational synthesis and rational verification.

Technical Contributions. In this work, we explore both verification and synthesis problems through the lens of rationality, defined by Pareto-optimality and Nash equilibria, for quantitative reachability objectives. For the synthesis problem, we also consider the *cooperative* variant where the environment cooperates with the system: we want to decide whether the system has a strategy and the environment a rational response to this strategy such

that the objective of the system is enforced. Our results are presented in Section 1, noting that all results lacking explicit references are, to our knowledge, novel contributions. For completeness, the table includes (new and known) results for the qualitative scenario.

The results for *PO rationality* are as follows. (1) For the verification problems, we assume that the behavior of the system is formalized by a *nondeterministic Mealy machine*, used to represent a (usually infinite) set of its possible implementations. For each of those implementations, we verify that the quantitative reachability objective of the system is met against any rational behavior of the environment. We establish that this problem is PSPACE-complete. To obtain the upper bound, we rely on a *genuine combination of techniques* based on Parikh automata and a recursive PSPACE algorithm (for positive Boolean combinations of bounded safety objectives, a problem of independent interest). Parikh automata are used to guess a compact representation of certificates which are paths of possibly exponential length in the size of the problem input. When the Mealy machine is deterministic, we show that the complexity goes down to Π_2^P -completeness, as the previous PSPACE algorithm is replaced by a coNP oracle. (2) For the synthesis problems, we only consider the cooperative version which we prove to be PSPACE-complete, as the non-cooperative version was established to be NEXPTIME-complete in [11].

The results for *NE rationality* are as follows. (1) We establish that, surprisingly, the verification problems are coNP-complete both for the general case of a nondeterministic Mealy machine and for the special case where it is deterministic. The upper bounds for those problems are again based on Parikh automata certificates but here there is no need to use a coNP oracle. (2) For the synthesis problems, the landscape is more challenging. For the cooperative case, we were able to establish that the problem is NP-complete. For the non-cooperative case, we have partially solved the problem and established the following results. When the environment is composed of a single rational player, the problem is in EXPTIME and PSPACE-hard. For an environment with at least two players, we show that the problem is EXPTIME-hard but we leave its decidability open. The lower bounds are obtained using an elegant reduction from countdown games [32]. We give indications in the paper why the problem is difficult to solve and why classical automata-theoretic methods *may not be sufficient* (if the problem is decidable).

In this paper, we focus on nonnegative weights as we show that considering arbitrary weights leads to undecidability of the synthesis problems. We also focus on NEs instead of SPEs, even if the latter are a better concept to model rational behavior in games played on graphs. Indeed, it is well-known that SPEs pose greater challenges than NEs. So, starting with NEs offers a better initial step for the algorithmic treatment of rational verification and synthesis in quantitative scenarios, an area that remains largely unexplored.

Related Work. The survey [16] presents several results about different game models and different kinds of objectives related to reachability. Quantitative objectives in *two-player zero-sum games* were largely studied, see e.g. [13, 20, 22], even if exact complexity results are often elusive due to the intricate nature of the problems (e.g. the exact complexity of solving mean-payoff games is still an open problem). In multi-player non zero-sum games, the (*constrained*) *existence* of equilibria is also well studied. The existence of simple NEs was established in [12] for mean-payoff and discounted-sum objectives. No decision problem is considered in that paper. The constrained existence of SPEs in quantitative reachability games was proved PSPACE-complete in [8]. We prove here that the complexity is lower when we use NEs to model rationality, as we obtain NP-completeness for the related cooperative synthesis problem. Deciding the constrained existence of SPEs was recently solved for

quantitative reachability games in [9] and for mean-payoff games in [5, 6]. The cooperative and non-cooperative rational *synthesis problems* were studied in [25] for games with mean-payoff and discounted-sum objectives when the environment is composed of a single player. The mean-payoff case was proved to be NP-complete and the discounted-sum case was linked to the open target discounted sum problem, which explains the difficulty of solving the problem in this case.

Structure of the Paper. The background is given in Section 2. The formal definitions of the studied problems and our main complexity results are stated in Section 3. The proofs of our results are given for PO rationality in Section 4, and for NE rationality in Section 5. We give a conclusion and future work in Section 6.

2 Background

Arenas and Plays. A (finite) *arena* \mathcal{A} is a tuple $(V, E, \mathcal{P}, (V_i)_{i \in \mathcal{P}})$ where V is a finite set of *vertices*, $E \subseteq V \times V$ is a set of *edges*, \mathcal{P} is a finite set of *players*, and $(V_i)_{i \in \mathcal{P}}$ is a partition of V , where V_i is the set of vertices *owned* by player i . We assume that $v \in V$ has at least one *successor*, i.e., the set $\text{succ}(v) = \{v' \in V \mid (v, v') \in E\}$ is nonempty.

We define a *play* $\pi \in V^\omega$ (resp. a *history* $h \in V^*$) as an infinite (resp. finite) sequence of vertices $\pi_0 \pi_1 \dots$ such that $(\pi_i, \pi_{i+1}) \in E$ for any two consecutive vertices π_i, π_{i+1} . The *length* $|h|$ of a history h is the number of its vertices. The empty history is denoted ε . Given a play π and two indexes $k < k'$, we write $\pi_{\leq k}$ the prefix $\pi_0 \dots \pi_k$ of π , $\pi_{\geq k}$ the suffix $\pi_k \pi_{k+1} \dots$ of π , and $\pi_{[k, k'[,}$ for $\pi_k \dots \pi_{k'-1}$. We denote the first vertex of π by $\text{first}(\pi)$. These notations are naturally adapted to histories. We also write $\text{last}(h)$ for the last vertex of a history $h \neq \varepsilon$. The set of all plays (resp. histories) of an arena \mathcal{A} is denoted $\text{Plays}_{\mathcal{A}} \subseteq V^\omega$ (resp. $\text{Hist}_{\mathcal{A}} \subseteq V^*$), and we write Plays (resp. Hist) when the context is clear. For $i \in \mathcal{P}$, the set $\text{Hist}_i \subseteq V^* V_i$ represents all histories ending in a vertex $v \in V_i$. That is, $\text{Hist}_i = \{h \in \text{Hist} \mid h \neq \varepsilon \text{ and } \text{last}(h) \in V_i\}$.

We can *concatenate* two nonempty histories h_1 and h_2 into a single one, denoted $h_1 \cdot h_2$ or $h_1 h_2$ if $(\text{last}(h_1), \text{first}(h_2)) \in E$. When a history can be concatenated to itself, we call it a *cycle*. Furthermore, a play $\pi = \mu \nu \nu \dots = \mu(\nu)^\omega$ where $\mu \nu \in \text{Hist}$ with ν a cycle, is called a *lasso*. The *length* of π is then the length of $\mu \nu$.² Given a play π , a *cycle along* π refers to a sequence $\pi_{[m, n[}$ with $\pi_m = \pi_n$. We denote $\text{Occ}(\pi) = \{v \in V \mid \exists n \in \mathbb{N}, v = \pi_n\}$ the set of all vertices occurring along π , and we say that π *visits* or *reaches* a vertex $v \in \text{Occ}(\pi)$ or a set T such that $T \cap \text{Occ}(\pi) \neq \emptyset$. The previous notions extend to histories.

Given an arena \mathcal{A} , if we fix an *initial vertex* $v_0 \in V$, we say that \mathcal{A} is *initialized* and we denote by $\text{Plays}(v_0)$ (resp. $\text{Hist}(v_0)$) all its plays (resp. nonempty histories) starting with v_0 . An arena is called *weighted* if it is augmented with a non-negative *weight function* $w_i : E \rightarrow \mathbb{N}$ for each player i . We denote by W the greatest weight, i.e., $W = \max\{w_i(e) \mid e \in E, i \in \mathcal{P}\}$. We extend w_i to any history $h = \pi_0 \dots \pi_n$ such that $w_i(h) = \sum_{j=1}^n w_i((\pi_{j-1}, \pi_j))$.

Reachability Games. A *reachability game* is a tuple $\mathcal{G} = (\mathcal{A}, (T_i)_{i \in \mathcal{P}})$ where \mathcal{A} is a weighted arena and $T_i \subseteq V$ is a *target set* for each $i \in \mathcal{P}$. We define a *cost function* $\text{cost}_i : \text{Plays} \rightarrow \mathbb{N} \cup \{+\infty\}$ for each player i , such that for all plays $\pi = \pi_0 \pi_1 \dots \in \text{Plays}$, $\text{cost}_i(\pi) = w_i(\pi_0 \dots \pi_n)$ with n the smallest index such that $\pi_n \in T_i$, if it exists and $\text{cost}_i(\pi) = +\infty$ otherwise.

The *reachability objective* of player i is to *minimize* this cost as much as possible, i.e., given two plays π, π' such that $\text{cost}_i(\pi) < \text{cost}_i(\pi')$, player i prefers π to π' . We extend $<$ to

² To have a well-defined length for a lasso π , we assume that $\pi = \mu(\nu)^\omega$ with $\mu \nu$ of minimal length.

tuples of costs as follows: $(\text{cost}_i(\pi))_{i \in \mathcal{P}} < (\text{cost}_i(\pi'))_{i \in \mathcal{P}}$ if $\text{cost}_i(\pi) \leq \text{cost}_i(\pi')$ for all $i \in \mathcal{P}$ and there exists some $j \in \mathcal{P}$ such that $\text{cost}_j(\pi) < \text{cost}_j(\pi')$. Given a play π , we denote by $\text{Visit}(\pi)$ the set of players i such that π visits T_i , i.e., $\text{Visit}(\pi) = \{i \in \mathcal{P} \mid \text{cost}_i(\pi) < +\infty\}$. When for all $i \in \mathcal{P}$ and $e \in E$, $w_i(e) = 0$, we speak of *qualitative* reachability games, since $\text{cost}_i(\pi) = 0$ if $\text{Occ}(\pi) \cap T_i \neq \emptyset$ and $+\infty$ otherwise.

Strategies and Mealy Machines. Let $\mathcal{A} = (V, E, \mathcal{P}, (V_i)_{i \in \mathcal{P}})$ be an arena. A *strategy* $\sigma_i : \text{Hist}_i \rightarrow V$ for player i maps any history $h \in \text{Hist}_i$ to a vertex $v \in \text{succ}(\text{last}(h))$, which is the next vertex that player i chooses to move to after reaching the last vertex in h . The set of all strategies of player i is denoted Σ_i . A play $\pi = \pi_0 \pi_1 \dots$ is *consistent* with σ_i if $\pi_{k+1} = \sigma_i(\pi_0 \dots \pi_k)$ for all $k \in \mathbb{N}$ such that $\pi_k \in V_i$. Consistency is naturally extended to histories. A tuple of strategies $\sigma = (\sigma_i)_{i \in \mathcal{P}}$ with $\sigma_i \in \Sigma_i$, is called a *strategy profile*. In an arena initialized at v_0 , we limit the domain of each strategy σ_i to $\text{Hist}_i(v_0)$; the play π starting from v_0 and consistent with each σ_i is denoted $\langle \sigma \rangle_{v_0}$ and called *outcome*.

Given an initialized arena \mathcal{A} , we can encode a strategy or a set of strategies by a (finite) *nondeterministic Mealy machine* [7, 19] $\mathcal{M} = (M, m_0, \delta, \tau)$ on \mathcal{A} , where M is a finite set of *memory states*, $m_0 \in M$ is the *initial state*, $\delta : M \times V \rightarrow 2^M$ is the *update* function, and $\tau : M \times V_i \rightarrow 2^V$ is the *next-move* function. Such a machine embeds a (possibly infinite) set of strategies σ_i for player i , called *compatible* strategies. Formally, σ_i is compatible with \mathcal{M} if there exists a mapping $h \mapsto m_h$ such that $m_{hv} \in \delta(m_h, v)$ for every $hv \in \text{Hist}(v_0)$ (with $m_h = m_0$ when h is empty), and when $v \in V_i$, $\sigma_i(hv) \in \tau(m_h, v)$. An example of such a machine \mathcal{M} is given in Appendix A. We denote by $\llbracket \mathcal{M} \rrbracket$ the set of all strategies compatible with \mathcal{M} . The *memory size* of \mathcal{M} is equal to $|M|$. We say that \mathcal{M} is *deterministic* when the image of both functions δ and τ is a singleton. Thus when \mathcal{M} is deterministic, $\llbracket \mathcal{M} \rrbracket = \{\sigma_i\}$ and σ_i is called *finite-memory*, and when additionally $|M| = 1$, σ_i is called *memoryless*.

3 Studied Problems

In this section, within the context of rational synthesis and verification, we consider a reachability game $\mathcal{G} = (\mathcal{A}, (T_i)_{i \in \mathcal{P}})$ with \mathcal{A} an initialized weighted arena and $\mathcal{P} = \{0, 1, \dots, t\}$ such that player 0 is a specific player, often called *system* or *leader*, and the other players $1, \dots, t$ compose the *environment* and are called *followers*. Player 0 announces his strategy σ_0 at the beginning of the game and is not allowed to change it according to the behavior of the other players. The response of those players to σ_0 is supposed to be *rational*, where the rationality can be described as the outcome of a *Nash equilibrium* [39] or as a *Pareto-optimal* play [18].

Nash Equilibria. A strategy profile for the environment is a Nash equilibrium if no player has an incentive to unilaterally deviate from this profile. In other words, no player can improve his cost by switching to a different strategy, assuming that the other players stick to their current strategies. Formally, given the initial vertex v_0 and a strategy σ_0 announced by player 0, a strategy profile $\sigma = (\sigma_i)_{i \in \mathcal{P}}$ is called a *0-fixed Nash equilibrium* (0-fixed NE) if for every player $i \in \mathcal{P} \setminus \{0\}$ and every strategy $\tau_i \in \Sigma_i$, it holds that $\text{cost}_i(\langle \sigma \rangle_{v_0}) \leq \text{cost}_i(\langle \tau_i, \sigma_{-i} \rangle_{v_0})$, where σ_{-i} denotes $(\sigma_j)_{j \in \mathcal{P} \setminus \{i\}}$, i.e., τ_i is not a profitable deviation. We also say that σ is a *σ_0 -fixed NE* to emphasize the strategy σ_0 of player 0.

Pareto-Optimality. When all players collaborate to obtain a best cost for everyone, we need another concept of rationality. In that case, we suppose that the players in $\mathcal{P} \setminus \{0\}$ form a *single* player, player 1, that has a *tuple* of targets sets $(T_i)_{i \in \{1, \dots, t\}}$. For each

play $\pi \in \text{Plays}(v_0)$, player 1 gets a cost tuple $\text{cost}_{\text{env}}(\pi) = (\text{cost}_i(\pi))_{i \in \{1, \dots, t\}}$, and prefers π to π' if $\text{cost}_{\text{env}}(\pi) < \text{cost}_{\text{env}}(\pi')$ for the componentwise partial order $<$ over $(\mathbb{N} \cup \{+\infty\})^t$. Given such a modified game and a strategy σ_0 announced by player 0, we consider the set C_{σ_0} of cost tuples of plays consistent with σ_0 that are *Pareto-optimal* for player 1, i.e., minimal with respect to $<$. Hence, $C_{\sigma_0} = \min\{\text{cost}_{\text{env}}(\pi) \mid \pi \in \text{Plays}(v_0) \text{ consistent with } \sigma_0\}$. Notice that C_{σ_0} is an antichain. A cost tuple p (called cost in the sequel) is said to be σ_0 -fixed *Pareto-optimal* (σ_0 -fixed PO or simply 0-fixed PO) if $p \in C_{\sigma_0}$. Similarly, a play is said to be σ_0 -fixed PO if its cost is σ_0 -fixed PO.

In some problems studied in this paper, we will have to consider games such that all vertices owned by player 0 have only one successor, which means that player 0 has no choice but to choose this successor. In this case, we say that *player 1 is the only one to play*.

Rational Verification. We now present the studied decision problems related to the concept of *rational verification*. Given some threshold $c \in \mathbb{N}$, the goal is to verify that a strategy σ_0 announced by player 0 guarantees him a cost $\text{cost}_0(\pi) \leq c$ whatever the rational response π of the environment. By rational response, we mean either a σ_0 -fixed NE outcome π , or a σ_0 -fixed PO play π . The strategy σ_0 is usually given as a deterministic Mealy machine. We can go further: with a nondeterministic Mealy machine, we want to verify whether all strategies $\sigma_0 \in \llbracket \mathcal{M} \rrbracket$ are solutions. In the latter case, we speak about *universal verification*.

► **Problem 1.** *Given a reachability game \mathcal{G} with an initialized arena, a nondeterministic Mealy machine \mathcal{M}_0 for player 0, and a threshold $c \in \mathbb{N}$,*


- *If $\llbracket \mathcal{M}_0 \rrbracket = \{\sigma_0\}$, the Non-Cooperative Nash Verification problem (NCNV) asks whether for all σ_0 -fixed NEs σ , it holds that $\text{cost}_0(\langle \sigma \rangle_{v_0}) \leq c$.*
- *The Universal Non-Cooperative Nash Verification problem (UNCNV) asks whether for all $\sigma_0 \in \llbracket \mathcal{M}_0 \rrbracket$ and all σ_0 -fixed NEs σ , it holds that $\text{cost}_0(\langle \sigma \rangle_{v_0}) \leq c$.*
- *If $\llbracket \mathcal{M}_0 \rrbracket = \{\sigma_0\}$, the Non-Cooperative Pareto Verification problem (NCPV) asks whether for all σ_0 -fixed PO plays π , it holds that $\text{cost}_0(\pi) \leq c$.*
- *The Universal Non-Cooperative Pareto Verification problem (UNCPV) asks whether for all $\sigma_0 \in \llbracket \mathcal{M}_0 \rrbracket$ and all σ_0 -fixed PO plays π , it holds that $\text{cost}_0(\pi) \leq c$.*

Rational Synthesis. We consider the more challenging problem of *rational synthesis*. Given a threshold $c \in \mathbb{N}$, the goal is to synthesize a strategy σ_0 for player 0 (instead of verifying some σ_0) that guarantees him a cost $\text{cost}_0(\pi) \leq c$ whatever the rational response π of the environment. We also consider the simpler problem where the environment *cooperates* with the leader by proposing *some* rational response π that guarantees him a cost $\text{cost}_0(\pi) \leq c$.


► **Problem 2.** *Given a reachability game \mathcal{G} with an initialized arena and a threshold $c \in \mathbb{N}$,*

- *The Cooperative Nash Synthesis (CNS) problem asks whether there exists $\sigma_0 \in \Sigma_0$ and a σ_0 -fixed NE σ such that $\text{cost}_0(\langle \sigma \rangle_{v_0}) \leq c$.*
- *The Non-Cooperative Nash Synthesis (NCNS) problem asks whether there exists $\sigma_0 \in \Sigma_0$ such that for all σ_0 -fixed NEs σ , it holds that $\text{cost}_0(\langle \sigma \rangle_{v_0}) \leq c$.*
- *The Cooperative Pareto Synthesis (CPS) problem asks whether there exists $\sigma_0 \in \Sigma_0$ and a σ_0 -fixed PO play π such that $\text{cost}_0(\pi) \leq c$.*
- *The Non-Cooperative Pareto Synthesis (NCPS) problem asks whether there exists $\sigma_0 \in \Sigma_0$ such that for all σ_0 -fixed PO plays π , it holds that $\text{cost}_0(\pi) \leq c$.*

► **Example 1.** To illustrate these problems, let us study a simple example depicted in Figure 1 with three players: the system, player 0, and two players in the environment, players \square and \diamond .



■ **Figure 1** An example illustrating the two concepts of rational response.



■ **Figure 2** An example showing that PO lasso plays in the coNCPV problem may have an exponential length.

Player 0 owns the circle vertices, player \square owns the square initial vertex v_0 , and player \diamond owns the diamond vertex v_2 . Each player i has a target set, $T_0 = \{v_3, v_4\}$, $T_{\square} = \{v_3, v_5\}$ and $T_{\diamond} = \{v_1, v_4\}$, and a constant weight $w_i(e) = 1$ for all $e \in E$. When a vertex v is in T_i , we depict the symbol of player i nearby v . As the graph is acyclic, the possible player strategies are all memoryless. In the sequel, we thus only indicate the successor chosen by the player.

Let us show that σ_0 defined by $\sigma_0(v_1) = v_2$ is a solution to the NCNS problem with the threshold $c = 3$. Given σ_0 , there exist four distinct strategy profiles $\sigma = (\sigma_0, \sigma_{\square}, \sigma_{\diamond})$. When, for example, $\sigma_{\square}(v_0) = v_2$ and $\sigma_{\diamond}(v_2) = v_5$, we abusively denote σ as $\{v_0 \rightarrow v_2, v_2 \rightarrow v_5\}$:

- $\{v_0 \rightarrow v_2, v_2 \rightarrow v_5\}$ is not a σ_0 -fixed NE because its outcome $\pi_1 = v_0 v_2 (v_5)^\omega$ has a infinite cost for player \diamond who will deviate from v_2 to v_4 to get a cost of 2;
- similarly, $\{v_0 \rightarrow v_1, v_2 \rightarrow v_5\}$ with outcome $\pi_2 = v_0 v_1 v_2 (v_5)^\omega$ is not a σ_0 -fixed NE;
- the profile $\{v_0 \rightarrow v_1, v_2 \rightarrow v_4\}$ is a σ_0 -fixed NE, its outcome is $\pi_3 = v_0 v_1 v_2 (v_4)^\omega$ with $\text{cost}_{\square}(\pi_3) = +\infty$, $\text{cost}_{\diamond}(\pi_3) = 1$ and $\text{cost}_0(\pi_3) = 3 \leq c$, so if player \square deviates from v_1 to v_2 , his cost is still $+\infty$, and player \diamond has no incentive to deviate since $\text{cost}_{\diamond}(\pi_3)$ is already the smallest available;
- the profile $\{v_0 \rightarrow v_2, v_2 \rightarrow v_4\}$ with the outcome $\pi_4 = v_0 v_2 (v_4)^\omega$ is also a σ_0 -fixed NE and $\text{cost}_0(\pi_4) = 2 \leq c$.

So, σ_0 is a solution to the NCNS problem with $c = 3$, but not with $c = 2$. It is also a solution for the CNS problem. One can verify that σ'_0 such that $\sigma'_0(v_1) = v_3$ is a solution to the NCNS problem with $c = 2$, since the only σ'_0 -fixed NE outcome is $\pi_5 = v_0 v_1 (v_3)^\omega$.

We now show that σ_0 is not a solution to the CPS problem with $c = 2$. Let us consider the same four outcomes as before. Their cost for the environment are: $\text{cost}_{\text{env}}(\pi_1) = (2, +\infty)$, $\text{cost}_{\text{env}}(\pi_2) = (3, 1)$, $\text{cost}_{\text{env}}(\pi_3) = (+\infty, 1)$, and $\text{cost}_{\text{env}}(\pi_4) = (+\infty, 2)$, meaning that $C_{\sigma_0} = \{(2, +\infty), (3, 1)\}$. Consequently, the only σ_0 -fixed PO plays are π_1 and π_2 , both giving a cost of $+\infty$ to player 0. However, the strategy σ'_0 is a solution, as there is only one σ'_0 -fixed PO play, $\pi_5 = v_0 v_1 (v_3)^\omega$, with $\text{cost}_{\text{env}}(\pi_5) = (2, 1)$ and $\text{cost}_0(\pi_5) = 2$.

Main Results. Our main results for Problems 1-2 are the following ones when the rational responses of the environment are 0-fixed PO plays. One problem was already solved in [11].

- ▶ **Theorem 2.** (a) *The Non-Cooperative Pareto Verification problem is Π_2^P -complete.*
- (b) *The Universal Non-Cooperative Pareto Verification problem is PSPACE-complete.*
- (c) *The Cooperative Pareto Synthesis problem is PSPACE-complete.*
- (d) *The Non-Cooperative Pareto Synthesis problem is NEXPTIME-complete [11].*

For 0-fixed NE responses of the environment, we obtain the next main results.

- ▶ **Theorem 3.** (a) *The Non-Cooperative Nash Verification problem is coNP-complete.*
- (b) *The Universal Non-Cooperative Nash Verification problem is coNP-complete.*
- (c) *The Cooperative Nash Synthesis problem is NP-complete.*

- (d) *The Non-Cooperative Nash Synthesis problem is EXPTIME-hard, already with a two-player environment. With a one-player environment, it is in EXPTIME and PSPACE-hard.*

These complexity results depend on the size $|V|$ of the arena, the number t of players i (resp. target sets T_i) in case of 0-fixed NE responses (resp. 0-fixed PO responses), the maximal weight W encoded in binary appearing in the functions w_i , the threshold c encoded in binary, and the size $|M|$ of the Mealy machine \mathcal{M}_0 (for the verification problems). Note that for all problems except the NCNS problem, the complexity classes are the same for both qualitative and quantitative frameworks (see Section 1). Hence, in the case of a *unary* encoding of the weights and the threshold c , we get the same complexity classes. Only the most challenging proofs are provided in the paper, while the other proofs or results derived from the literature are deferred in the Appendix.

In this paper, we focus on zero or positive weights, because with negative weights, there are simple examples of one-player games with no NE or no PO plays (thus with no rational responses). Furthermore, considering any weights leads to the undecidability of the NCNS and NCPS problems. Those results are obtained by reduction from the undecidability of zero-sum multidimensional shortest path games [44, 45]. See details in Appendix B.

► **Theorem 4.** *With integer weight functions, the Non-Cooperative Nash Synthesis problem and the Non-Cooperative Pareto Synthesis problem are undecidable.*

4 Pareto-Optimality

In this section, we provide the proofs of the upper bounds in Theorem 2. Recall that the environment is here composed of the sole player 1 having t target sets T_i , and his rational responses to a strategy σ_0 announced by player 0 are σ_0 -fixed PO plays. The lower bounds are proved in Appendix C with reductions from QBF or some of its variants [46]. All those reductions already hold for qualitative reachability games. We thus obtain the same complexity classes as in Theorem 2 for this class of games, as indicated in Section 1.

To solve the two verification problems (NCPV and UNCPV), we first construct the product game³ $\mathcal{G} \times \mathcal{M}_0$ of size polynomial in \mathcal{G} and \mathcal{M}_0 , and we *assume* to directly work with this game, *again denoted* \mathcal{G} . Note that in the product game, when \mathcal{M}_0 is nondeterministic, player 0 is able to play any strategy σ_0 compatible with \mathcal{M}_0 , and when \mathcal{M}_0 is deterministic, the verification problems are simplified as there is a single compatible strategy σ_0 . The complement of the (U)NCPV problem has many similarities with the CPS problem:

► **Problem 3.** *The complement of the (U)NCPV problem (co(U)NCPV) asks whether there exists $\sigma_0 \in \Sigma_0$ and a σ_0 -fixed PO play π such that $\text{cost}_0(\pi) > c$.*

Indeed, the statement is the same except that the inequality $\text{cost}_0(\pi) \leq c$ in the CPS problem is here replaced by $\text{cost}_0(\pi) > c$. To prove the upper bounds of Theorem 2, we thus have to solve the decision problem “do there exist $\sigma_0 \in \Sigma_0$ and a σ_0 -fixed PO play π such that $\text{cost}_0(\pi) \sim c$?” with $\sim \in \{\leq, >\}$. In short, the algorithm to solve the CPS problem and the complement of the (U)NCPV problem proceeds through the following steps:

1. Guess a play π in the form $\pi = \mu(\nu)^\omega$ in polynomial time. The length of the lasso is polynomial or exponential, depending on the studied problem. In the latter case, we will guess a succinct representation of the lasso by using Parikh automata [23, 35].

³ The product of a game with a Mealy machine is recalled in Appendix A.

2. Compute in polynomial time $\text{cost}_{\text{env}}(\pi)$ and verify in polynomial time that $\text{cost}_0(\pi) \sim c$.
3. Verify that player 0 has a strategy σ_0 , with π consistent with σ_0 , that guarantees that $\text{cost}_{\text{env}}(\pi)$ is σ_0 -fixed PO. This last step will be done in coNP or in PSPACE, depending on the studied problem.

Therefore, if a strategy σ_0 exists as in Step 3, the σ_0 -fixed PO play π such that $\text{cost}_0(\pi) \sim c$ is the lasso of Step 1. Let us now provide detailed proofs for these three steps.

4.1 Existence of Lassos

The goal in this section is to prove the next lemma stating that one can always suppose that π is a lasso. For that purpose, we use a classical approach consisting of removing cycles [10, 15, 21].

► **Lemma 5.** *Let $\sigma_0 \in \Sigma_0$ and π be a σ_0 -fixed PO play π such that $\text{cost}_0(\pi) \sim c$. Then there exist $\sigma'_0 \in \Sigma_0$ and a σ'_0 -fixed PO play $\pi' = \mu(\nu)^\omega$ such that $\text{cost}_0(\pi') \sim c$. Moreover, $\text{Visit}(\mu) = \text{Visit}(\mu\nu)$ and*

- *if $\text{cost}_0(\pi) \leq c$, then $|\mu| \leq (t+1)|V|$, $|\nu| \leq |V|$, $\text{cost}_{\text{env}}(\pi') \in \{0, 1, \dots, B, +\infty\}^t$, with $B = (t+2)|V|W$,*
- *if $\text{cost}_0(\pi) > c$, then $|\mu| \leq c + (t+1)|V|$, $|\nu| \leq |V|$, $\text{cost}_{\text{env}}(\pi') \in \{0, 1, \dots, B, +\infty\}^t$, with $B = (c + (t+2)|V|)W$.*

Proof. Let $\pi = \pi_0\pi_1 \dots$ be a σ_0 -fixed PO play such that $\text{cost}_0(\pi) \sim c$.

Suppose that $\text{cost}_0(\pi) \leq c$. Consider, along π , any two consecutive first visits to two target sets, say T_i and T_j . If there exists $m < n$ such that $\pi_n = \pi_m$ between these two visits, we remove the cycle $\pi_{[m,n[}$ from π . We repeat this process until there are less than $|V|$ vertices between the two visits, for any such pair T_i, T_j , but also between π_0 and the first visit to a target set. Let us denote π' the resulting play. Consider now along π' the last first visit to a target set, say at index k . We then seek for the first repeated vertex $\pi'_{\ell_1} = \pi'_{\ell_2}$ with $k \leq \ell_1 < \ell_2$ after k . In this way, we obtain $\nu = \pi'_{[\ell_1, \ell_2[}$ with $|\nu| \leq |V|$ and $\mu = \pi'_{[0, \ell_1[}$ with $|\mu| \leq (t+1)|V|$. So, we get the required lasso $\mu(\nu)^\omega$ such that $\text{Visit}(\mu) = \text{Visit}(\mu\nu)$, $\text{cost}_0(\mu(\nu)^\omega) \leq \text{cost}_0(\pi) \leq c$, and $\text{cost}_{\text{env}}(\mu(\nu)^\omega) \in \{0, 1, \dots, B, +\infty\}^t$, with $B = (t+2)|V|W$.

The case $\text{cost}_0(\pi) > c$ is treated similarly, except that we cannot remove cycles along the longest prefix h of π such that $\text{cost}_0(h) \leq c$, as this operation might decrease the cost of player 0. We thus get $|\mu| \leq c + (t+1)|V|$, $\text{cost}_0(\mu(\nu)^\omega) > c$, and $\text{cost}_{\text{env}}(\mu(\nu)^\omega) \in \{0, 1, \dots, B, +\infty\}^t$, with $B = (c + (t+2)|V|)W$.

It remains to explain how to construct a strategy σ'_0 from σ_0 such that $\pi' = \mu(\nu)^\omega$ is σ'_0 -fixed PO. First, σ'_0 is built in a way to produce π' . Second, we have to define σ'_0 outside π' , i.e., from any $h'v$, with $v \in V$, such that h' is prefix of π' but not $h'v$. Let h be such that the elimination of cycles done in π , restricted to h , leads to h' . We then define $\sigma'_0(h'g) = \sigma_0(hg)$ for all histories $g \in \text{Hist}(v)$. Notice that σ'_0 is the required strategy as the elimination of cycles in a history or a play decreases the costs. ◀

► **Example 6.** When $\text{cost}_0(\pi) > c$, Lemma 5 provides a bound on $|\mu\nu|$ that is exponential in the binary encoding of c . In Figure 2, we present a small example of a reachability game showing that this is unavoidable. The initial vertex v_0 is owned by player 1, v_1 is owned by player 0, and there are two weight functions w_0 and w_1 (thus $t = 1$). Both players have the same target set: $T_0 = T_1 = \{v_1\}$. Notice that player 1 is the only one to play, and a play $\pi \in \text{Plays}(v_0)$ is PO if and only if visits T_1 (and has $\text{cost}_{\text{env}}(\pi) = 0$). Hence, given a threshold c , any PO play π with $\text{cost}_0(\pi) > c$ is equal to $v_0^k(v_1)^\omega$ with $k > c$. The length $|v_0^k v_1|$ is thus greater than c . Therefore, Step 1 of our decision algorithm for the co(U)NCPV cannot guess an explicit representation $\mu(\nu)^\omega$ if we want to stick to a polynomial time algorithm.

4.2 Particular Zero-sum Games

Now that we know we can limit our study to lassos π , Step 3 requires to verify that player 0 has a strategy σ_0 ensuring that $\text{cost}_{\text{env}}(\pi)$ is σ_0 -fixed PO. Before going deeper into this step, we need to study some particular two-player zero-sum games.⁴ Let $\mathcal{A} = (V, E, \mathcal{P}, (V_i)_{i \in \mathcal{P}}, (w_i)_{i \in \{1, \dots, t\}})$ be an arena with $\mathcal{P} = \{Eve, Adam\}$ and equipped with t weight functions $w_i : E \rightarrow \mathbb{N}$. We suppose that \mathcal{A} is initialized with $v_0 \in V$. We fix t target sets $T_i \subseteq V$ and t constants $d_i \in \mathbb{N}^{>0} \cup \{+\infty\}$. We denote by $\mathcal{G} = (\mathcal{A}, \Omega)$ a zero-sum game whose *objective* Ω is a Boolean combination of the following objectives:

- $\text{Reach}_{<d_i}(T_i) = \{\pi \in \text{Plays}(v_0) \mid \text{cost}_i(\pi) < d_i\}$ called *bounded reachability objective*, and
- $\text{Safe}_{\geq d_i}(T_i) = \text{Plays}(v_0) \setminus \text{Reach}_{<d_i}(T_i)$ called *bounded safety objective*.

Solving such a game \mathcal{G} means to decide whether *Eve* has a strategy σ such that all plays $\pi \in \text{Plays}(v_0)$ consistent with σ belong to the objective Ω . If such a strategy σ exists, we say that σ is *winning for* Ω and that the initial vertex v_0 is *winning for Eve for* Ω .

For the PO-check required for Step 3, will see in Section 4.3 that we need to solve the zero-sum games stated in the next two propositions, where the constants d_i are encoded in binary. The second proposition will be used in the general case of nondeterministic Mealy machines \mathcal{M}_0 while the first one will be used in the deterministic case. Proposition 7 is a quantitative extension of a result in [24] about (qualitative) generalized reachability games.

► **Proposition 7.** *Let $\mathcal{G} = (\mathcal{A}, \Omega)$ be a zero-sum game with $\Omega = \bigcap_{1 \leq i \leq t} \text{Reach}_{<d_i}(T_i)$ and *Eve* is the only one to play. Deciding whether v_0 is winning for *Eve* is an NP-complete problem.*

Proof. We first notice that if *Eve* has a winning strategy from v_0 , i.e., there exists a play $\pi \in \Omega$, then we can eliminate cycles as in the proof of Lemma 5. Therefore, there exists a lasso $\pi' = \mu(\nu)^\omega \in \Omega$ where $|\mu\nu| \leq (t+2)|V|$. Thus, to get an algorithm in NP, we guess such a lasso π' and verify that $\text{cost}_i(\pi') < d_i$ for each $i \in \{1, \dots, t\}$. This is possible in polynomial time with the costs encoded in binary. It is proved in [24] that solving (qualitative) generalized reachability games with $V_{Adam} = \emptyset$ is NP-complete. Our problem is thus NP-hard by a reduction from the previous problem with the same arena, the weight functions assigning a null weight to all edges, and by setting $(d_1, \dots, d_t) = (+\infty, \dots, +\infty)$. ◀

The next proposition, of potential independent interest, is easily extended to any positive Boolean combinations of bounded safety objectives.

► **Proposition 8.** *Let $\mathcal{G} = (\mathcal{A}, \Omega)$ be a zero-sum game where $\Omega = \Omega^{(1)} \cup \Omega^{(2)}$, with $\Omega^{(1)} = \left(\bigcap_{1 \leq i \leq t} \text{Safe}_{\geq d_i}(T_i)\right)$ and $\Omega^{(2)} = \left(\bigcup_{1 \leq i \leq t} \text{Safe}_{\geq d_i+1}(T_i)\right)$, and such that $+\infty + 1 = +\infty$. Then, deciding whether v_0 is winning for *Eve* is in PSPACE.*

Proof. We solve the game (\mathcal{A}, Ω) by using a recursive algorithm. To know whether v_0 is winning for *Eve*, we run a depth-first search over a finite tree rooted at v_0 that is the (truncated) unraveling of \mathcal{A} , and we keep track of the accumulated weights along the explored branch as a tuple $(c_i)_{1 \leq i \leq t}$, where each c_i is encoded in binary. Each explored branch h will have its leaf decorated by a boolean $f(h) = \perp$ (*Eve* is losing) or $f(h) = \top$ (*Eve* is winning) according to some rules that we describe below. Then the depth-first search algorithm backwardly assigns a boolean to the internal nodes of the tree according to the following rule: for any $hv \in V^*V_{Eve}$, we have $f(hv) = \top$ if there exists $v' \in \text{succ}(v)$ such that $f(hvv') = \top$,

⁴ We suppose that the reader is familiar with this concept.

otherwise $f(hv) = \perp$, while for any $hv \in V^*V_{Adam}$, we have $f(hv) = \top$ if for all $v' \in \text{succ}(v)$, $f(hvv') = \top$, otherwise $f(hv) = \perp$. To have an algorithm executing in polynomial space, the depth of the tree must be polynomial.

Along a branch, the rules are the following to stop the exploration (the objective Ω may be modified during the exploration):

- If for some i , the current weight c_i is such that $c_i \geq d_i + 1$ and T_i was not visited, then we can stop the branch h and set $f(h) = \top$. Indeed, $\Omega^{(2)}$ is satisfied, and thus also Ω .
- If for some i , we have $c_i < d_i$ while visiting T_i , then $\Omega^{(1)}$ is not satisfiable anymore, and we continue the exploration with the sole objective $\Omega^{(2)}$ where the i -th objective $\text{Safe}_{\geq d_i+1}(T_i)$ being ignored (as it is not satisfied).
- If for some i , we have $c_i = d_i$ while visiting T_i , then we continue the exploration with Ω such that $\text{Safe}_{\geq d_i}(T_i)$ is removed from $\Omega^{(1)}$ (as it is satisfied) and $\text{Safe}_{\geq d_i+1}(T_i)$ is removed from $\Omega^{(2)}$ (as it is not satisfied).
- If $\Omega^{(1)}$ becomes an empty intersection, then we stop the branch h and set $f(h) = \top$.
- If $\Omega^{(1)}$ has been removed from Ω (because it was not satisfiable anymore) and $\Omega^{(2)}$ becomes an empty union, then we stop the branch h and set $f(h) = \perp$.
- There is one more case to stop the branch h : when some vertex v is visited twice, i.e., $h = gvg'v$ for some $g, g' \in V^*$. Then we stop the branch and set $f(h) = \top$. Indeed, we stand in a better situation in $gvg'v$ than in gv concerning the accumulated weights, as we consider bounded safety objectives.

The last case happens as soon as the explored branch has length $|V| + 1$ and the other cases do not occur. Therefore, as there are t bounded safety objectives in both $\Omega^{(1)}$ and $\Omega^{(2)}$, any branch has a length polynomially bounded by $t|V|$. Moreover, the accumulated weights c_i are all bounded by $t|V|W$, thus stored in a polynomial space when encoded in binary. We can thus decide in polynomial space whether v_0 is winning for *Eve* for Ω . ◀

4.3 Pareto-Optimality Check

Let us come back to our reachability games. We can now solve Step 3 where given a lasso π with $\text{cost}_{\text{env}}(\pi) \in \{0, 1, \dots, B, +\infty\}^t$ (by Lemma 5), we want to verify whether player 0 has a strategy σ_0 guaranteeing that $\text{cost}_{\text{env}}(\pi)$ is σ_0 -fixed PO. If player 1 is the only one to play in the game, it reduces to verify that $\text{cost}_{\text{env}}(\pi)$ is PO. The latter problem is in coNP as stated in the next lemma, while the former is in PSPACE as stated in Lemma 10.

► **Lemma 9.** *Suppose that player 1 is the only one to play. Deciding whether a given cost $p \in \{0, 1, \dots, B, +\infty\}^t$ is PO is in coNP.*

Proof. The cost p is *not* PO if there exists a play $\pi' \in \text{Plays}(v_0)$ such that $\text{cost}_i(\pi') \leq p_i$ for all $i \in \{1, \dots, t\}$ and $\text{cost}_j(\pi') < p_j$ for some $j \in \{1, \dots, t\}$. That is, if for some j , there exists a play $\pi' \in \Omega^{(j)} = \bigcap_{i \neq j} \text{Reach}_{< p_i+1}(T_i) \cap \text{Reach}_{< p_j}(T_j)$. Solving the zero-sum game (\mathcal{A}, Ω) is in NP by Proposition 7. This concludes the proof. ◀

► **Lemma 10.** *Given $p = \text{cost}_{\text{env}}(\pi) \in \{0, 1, \dots, B, +\infty\}^t$ being the cost of a play π , deciding whether player 0 has a strategy σ_0 ensuring that p is σ_0 -fixed PO is in PSPACE.*

Proof. To prove the lemma, we first fix a prefix h of π , with $v \in V$, such that hv is not a prefix of π (hv is called a *deviation*), and we study the zero-sum game $(\mathcal{A}, \Omega^{(hv)})$ with the objective $\Omega^{(hv)}$ equal to $\{\pi' \in \text{Plays}(v) \mid \neg(\text{cost}_{\text{env}}(h\pi') < p)\}$. Let us show that deciding whether v is winning for player 0 for $\Omega^{(hv)}$ is in PSPACE. Notice that for each $i \in \{1, \dots, t\}$ such that h does not visit T_i , we have, with $q_i = w_i(hv)$ and $+\infty - q_i = +\infty$:

$\text{cost}_i(h\pi') < p_i$ if and only if $\text{cost}_i(\pi') < p_i - q_i$. Let us rewrite the condition $\neg(p' < p)$ with $p, p' \in \mathbb{N}^t$ as follows: $(\forall i \in \{1, \dots, t\} p'_i \geq p_i) \vee (\exists i \in \{1, \dots, t\} p'_i > p_i)$. Hence, the objective $\Omega^{(hv)}$ can be rewritten as $\left(\bigcap_{\text{Occ}(h) \cap T_i = \emptyset} \text{Safe}_{\geq p_i - q_i}(T_i) \right) \cup \left(\bigcup_{\text{Occ}(h) \cap T_i = \emptyset} \text{Safe}_{\geq p_i - q_i + 1}(T_i) \right)$.

By Proposition 8, given the constants p_i and q_i , we can check whether v is winning for player 0 in polynomial space. Notice that each q_i can be computed in polynomial space by accumulating the weights, with respect to w_i , as long as T_i is not visited (as $q_i \leq p_i$).

Second, given two deviations $hv, h'v$ ending with the same vertex v and such that h is prefix of h' , if $\text{Visit}(h') = \text{Visit}(h)$ and v is winning for $\Omega^{(hv)}$, then v is also winning for $\Omega^{(h'v)}$ (with the same strategy). Indeed, the constants q'_i for $h'v$ are greater than the constants q_i for hv . We are thus in a “better situation” than in $\Omega^{(h'v)}$. So, it suffices to consider polynomially many deviations hv , as π can visit at most t target sets and there are at most $|V|$ vertices v .

Finally, deciding whether player 0 has a strategy σ_0 ensuring that p is σ_0 -fixed PO amounts to solving the zero-sum games $(\mathcal{A}, \Omega^{(hv)})$ for polynomially many deviations hv . If player 0 has a winning strategy σ_{hv} for all those games, the required strategy σ_0 is defined as $\sigma_0(g) = \sigma_{hv}(vg')$ for all histories g such that $g = hv g'$ with the longest prefix h of π . \blacktriangleleft

4.4 Upper Bounds

We are now ready to prove the upper bounds in Theorem 2 by providing the announced algorithms for Steps 1-3. The proof is divided according to the considered problem. We need to recall [23] that a Parikh automaton is a nondeterministic finite automaton (NFA) over an alphabet Σ and whose transitions are weighted by tuples in \mathbb{N}^k , together with a semilinear set $\mathbf{C} \subseteq \mathbb{N}^k$. It accepts a word $w \in \Sigma^*$ if there exists a run on w ending on an accepting state such that the sum of all encountered weight tuples belongs to \mathbf{C} . The non-emptiness problem for Parikh automata is NP-complete for numbers encoded in binary [23].

Proof of the upper bounds in Theorem 2. We begin with the CPS problem (Theorem 2.c). Let us give an algorithm in PSPACE that decides whether there exist $\sigma_0 \in \Sigma_0$ and a σ_0 -fixed PO play π such that $\text{cost}_0(\pi) \leq c$. By Lemma 5, we guess a lasso $\pi = \mu(\nu)^\omega$ with $|\mu\nu| \leq (t+2)|V|$, in time polynomial in $|V|$ and t . Then, we compute $p = \text{cost}_{\text{env}}(\pi)$ and $\text{cost}_0(\pi)$ and check whether $\text{cost}_0(\pi) \leq c$. This can be done in time polynomial in t , $|V|$, and the binary encoding of W and c by Lemma 5. Finally, by Lemma 10, we verify in polynomial space whether player 0 has a strategy σ_0 ensuring that p is σ_0 -fixed PO.

For the NCPV problem (Theorem 2.a), recall that we consider its complementary coNCPV problem (see Problem 3), and that player 1 is the only one to play. We begin by giving an algorithm in NP for Step 1 and 2. Lemma 5 does not provide a polynomial bound on the length of the lasso $\pi = \mu(\nu)^\omega$ due to the threshold c given in binary. However, we will guess a succinct representation of π by using Parikh automata.

The idea is the following one. Along the prefix μ of the lasso π , some target sets T_{k_1}, \dots, T_{k_n} are visited, with $n \leq t$, such that the first visits are in vertices $\pi_{\ell_1}, \dots, \pi_{\ell_n}$ with $\ell_1 < \dots < \ell_n$. And after μ , no more target sets are visited along $\mu\nu$ (see Lemma 5). We start by guessing a sequence $v_0, v_1, \dots, v_n, v_{n+1}$ of vertices, called *markers*, with the aim that v_0 is the initial vertex, $v_i = \pi_{\ell_i}$, $1 \leq i \leq n$, and $v_{n+1} = \text{first}(\nu)$. By Lemma 5, we know that $\text{cost}_{\text{env}}(\pi) \in \{0, 1, \dots, B, +\infty\}^t$, where $B = (c + (t+2)|V|)W$. We thus guess a tuple $(p_0, p_1, \dots, p_t) \in \{0, 1, \dots, B, +\infty\}^t$ with the aim that $(p_1, \dots, p_t) = \text{cost}_{\text{env}}(\mu)$ and $p_0 = w_0(\mu)$. We also guess for each *portion* $\pi_{[\ell_i, \ell_{i+1}]}$, $i \leq n$,

- a weight $q_0^{(i)} \in \{0, 1, \dots, B\}$ for player 0 with the aim that $q_0^{(i)} = w_0(\pi_{[\ell_i, \ell_{i+1}]})$ and $w_0(\mu) = p_0 = \sum_i q_0^{(i)}$,
- a “useful” environment weight tuple, i.e., for all $j \in \{1, \dots, t\}$, a weight $q_j^{(i)} \in \{0, 1, \dots, B\}$ such that $\pi_{[0, \ell_i]}$ does not visit T_j , with the aim that $q_j^{(i)} = w_j(\pi_{[\ell_i, \ell_{i+1}]})$ and $\text{cost}_j(\mu) = p_j = \sum_i q_j^{(i)}$.⁵

We can guess in polynomial time the sequence $v_0, v_1, \dots, v_n, v_{n+1}$ and the constants $p_j, q_j^{(i)}$ encoded in binary, as $n \leq t$ and $B = (c + (t + 2)|V|)W$. We then check in polynomial time that v_0 is the initial state, that each v_i belongs to a distinct target set T_{k_i} , $1 \leq i \leq n$, that $p_j = \sum_i q_j^{(i)}$ for each j , and that $p_0 > c$ for the given threshold c .⁶

It remains to check the existence of polynomially many paths:

- For each $i \leq n$, the existence of a path $\rho^{(i)}$ from v_i to v_{i+1} on a subgraph of \mathcal{A} restricted to some sets $V^{(i)}$ and $E^{(i)}$ of vertices and edges respectively, and to some weight functions, such that $w_j(\rho^{(i)}) = q_j^{(i)}$ for all j .
- The existence of a path from v_{n+1} to itself (the cycle ν) that visits no new target set with respect to T_{k_i} , $1 \leq i \leq n$.

The first check can be done thanks to Parikh automata : one can decide in NP the existence of a path in a subgraph of \mathcal{A} between two given vertices and with a given weight tuple \bar{q} (the subgraph is seen as a Parikh automaton with $\Sigma = \{\#\}$ and $\mathbf{C} = \{\bar{q}\}$).⁷ The set $V^{(i)}$ is defined as $V \setminus \left(\bigcup_{j > i+1} T_{k_j} \cup \bigcup_{p_j = +\infty} T_j \right)$, and the set $E^{(i)}$ as $(E \cap V^{(i)} \times V^{(i)}) \setminus \{(v, v') \mid v \in T_{k_{i+1}}\}$. Indeed, for the portion $\pi_{[\ell_i, \ell_{i+1}]}$, we do not allow to prematurely visit a target set T_{k_j} , $j \geq i + 1$, except $v_{i+1} \in T_{k_{i+1}}$, and there are target sets that we do not want to visit at all. We also remove the weight function w_{k_j} with $j \in \{1, \dots, i\}$. The second check can be done thanks to classical automata, by restricting the set of vertices to $V \setminus \left(\bigcup_{p_j = +\infty} T_j \right)$. To show that the coNCPV problem is in Σ_2^P , in the previous algorithm in NP that guesses a lasso π with $\text{cost}_{\text{env}}(\pi) = p$, we add an oracle in coNP to check whether p is a PO cost thanks to Lemma 9. As $\text{NP}^{\text{coNP}} = \Sigma_2^P$, we get that the NCPV problem is in Π_2^P .

It remains to show that the coUNCPV problem is in PSPACE to get the upper bound of Theorem 2.b). The approach is to guess a cost $p \in \{0, \dots, B, +\infty\}^t$ and a length ℓ for the exponential lasso π of Lemma 5, whose both encodings in binary use a polynomial space. We guess π vertex by vertex, by only storing the current edge (u, u') , the current accumulated weight (c_0, c_1, \dots, c_t) on each dimension, and which target sets T_i have already been visited. At any time, the stored information uses a polynomial space. At each guess, we apply the reasoning of Lemma 10 to check in polynomial space whether player 0 can ensure that p is a PO cost from each vertex $v \neq u'$ successor of u (i.e., from any deviation of π). We also check that for each first visit to a target set T_i , we have $c_i = p_i$ if $i \in \{1, \dots, t\}$, and $c_i > c$ if $i = 0$. At each guess, a counter is incremented until reaching the length ℓ , where we stop guessing π and finally check whether $p_i = +\infty$ for each T_i that has not been visited.

This completes the proof as Theorem 2.d is established in [11]. ◀

⁵ If $\pi_{[0, \ell_i]}$ visits T_j , then $\text{cost}_j(\pi)$ is already known as $\text{cost}_j(\pi) = \text{cost}_j(\pi_{[0, \ell_i]})$.

⁶ To keep the proof readable, we assume that each v_i belongs to one target set T_{k_i} . In general, it could belong to several target sets. The proof is easily adapted by considering the union of target sets.

⁷ We do not need to use an oracle here. It suffices to plug the NP algorithm for Parikh automata in ours as if the required path exists, our algorithm will find it in polynomial time.

5 Nash Equilibria

We now discuss the proofs of Theorem 3. The environment is here composed of t players whose rational responses to a strategy σ_0 of player 0 are σ_0 -fixed NE outcomes.

The upper bounds for (U)NCNV and CNS problems given in Theorem 3.a-c are proved with the same approach as for Pareto optimality, limited to Steps 1-2. There is no need for Step 3, thanks to a well-known characterization of NE outcomes (based on the values of some two-player zero-sum games, see e.g. [10, 17] or Appendix D) that is directly checked on the lasso guessed in Step 1. We need again Parikh automata to guess a succinct representation of the lasso. The lower bounds for those problems were already known for qualitative reachability games [28]. See Appendix E.


We thus focus on the NCNS problem (Theorem 3.d). We prove below that this problem is EXPTIME-hard, already for two-player environments. The decidability is left open. This decision problem is a real challenge that cannot be solved by known approaches. Indeed, the technique of tree automata, as used in [21] to show the decidability of several ω -regular objectives, is not applicable in the context of quantitative reachability. This is because, while in the scenario of qualitative reachability, the costs are Boolean and can be encoded within the finite state space of a tree automaton, for quantitative reachability, these costs are now integers that are not bounded and vary according to the strategy σ_0 that is being synthesized. Consequently, it is not feasible to directly encode constraints within the states of the automaton in this latter case. Additionally, there is a necessity to enforce constraints related to subtrees, such as comparing (unbounded) costs between two subtrees. Generally, incorporating the capability to enforce subtree constraints in tree automata results in undecidability, with only certain subclasses having a decidable emptiness problem, see e.g. [3]. Therefore, addressing the general case would necessitate either advancements in the field of automata theory or an entirely new methodological approach.

However, we are able to solve the practically relevant case of one-player environments for which we prove that the NCNS problem is PSPACE-hard and in EXPTIME in Appendix F. The PSPACE-hardness is given by a classical reduction from the subset-sum game problem [47]. The intuition for the EXPTIME-membership is the following: it consists in finding a play π where $\text{cost}_0(\pi) \leq c$ such that when the only component of the environment deviates from π , either the system inflicts to the deviating play π' a cost for the environment such that $\text{cost}_1(\pi') > \text{cost}_1(\pi)$ meaning that deviating is not profitable, or it ensures a cost for himself such that $\text{cost}_0(\pi') \leq c$. Note that this approach only works for one-player environments.

We are also able to solve the NCNS problem for any number of players in the environment, for the variant where the rational NE responses of the environment aim to ensure costs bounded by a given threshold rather than minimizing these costs (this is also arguably an interesting model of rationality in practice). This is a perspective studied in [43] in the case of NEs for discounted-sum objectives. We show in Appendix G that this variant is EXPTIME-complete.

► **Theorem 11.** *The Non-Cooperative Nash Synthesis problem where the objective of each player $i \in \{1, \dots, t\}$ is a bounded reachability objective $\text{Reach}_{<d_i}(T_i)$ is EXPTIME-complete, and hardness holds even with a one-player environment.*

Reduction for Two-Player Environments. We finally prove that the NCNS problem is EXPTIME-hard, already for a two-player environment (lower bound of Theorem 3.d). The reduction is given from the *countdown game problem*, known to be EXPTIME-complete [32]. Given a threshold $c \in \mathbb{N}$, a countdown game \mathcal{CG} is a two-player zero-sum game played on

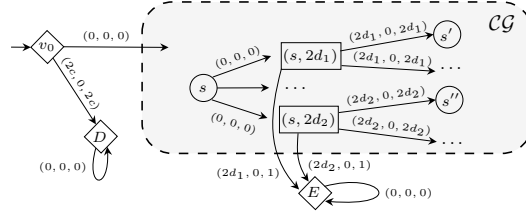

■ **Figure 3** Reduction from the countdown game problem to the NCNS problem (two-player env.).

a directed graph (V, E) where $E \subseteq V \times \mathbb{N}^{>0} \times V$. A configuration is a pair $(s, k) \in V \times \mathbb{N}$, initially $(s_0, 0)$ with s_0 an initial vertex, from where player 0 chooses $d \in \mathbb{N}^{>0}$ such that there exists $(s, d, s') \in E$ (we assume that such a d always exists). Player 1 then chooses such an $s' \in V$ to reach the configuration $(s', k + d)$. When reaching a configuration (s, k) with $k \geq c$, the game stops and player 0 wins if and only if $k = c$.⁸ Player 0 wins the game \mathcal{CG} if he has a strategy σ_0 from s_0 that allows him to reach some configuration (s, c) , whatever the strategy of player 1.

► **Theorem 12.** *The Non-Cooperative Nash Synthesis problem with a two-player environment is EXPTIME-hard.*

Proof. Given a countdown game \mathcal{CG} and a threshold c , we build a reachability game \mathcal{G} as depicted in Figure 3 with three players, player 0 (owning the circle vertices of \mathcal{CG}), player 1 (owning the square vertices of \mathcal{CG}), and player 2 (owning the initial vertex v_0 and vertices D, E). The three weight functions are indicated on the edges, with a null weight on all edges for player 1. The initial vertex v_0 has two outgoing edges, one towards vertex D and the other one to the initial vertex s_0 of \mathcal{CG} . Inside \mathcal{CG} , players 0 and 1 are simulating the countdown game. The target sets are $T_0 = T_2 = \{D, E\}$ and $T_1 = V$. Thus, for any play, player 1 gets a cost of 0 and will never have the incentive to deviate from his strategy. The \mathcal{CG} part of the figure contains a slight modification of the given countdown: players 0 and 1 act as in \mathcal{CG} , player 1 can exit it by taking the edge to vertex E , the weights d are multiplied by 2. More precisely, player 0 first selects a transition from a vertex s to some vertex $(s, 2d)$, with $d \in \mathbb{N}^{>0}$, then player 1 responds with a successor s' such that (s, d, s') is an edge in the initial countdown game. At any point $(s, 2d)$, player 1 can exit the \mathcal{CG} by going to E , adding $2d$ to the cost of player 0 and 1 to the cost of player 2, i.e., it gives the cost tuple $(2k + 2d, 0, 2k + 1)$ where $2k$ is the accumulated weight inside \mathcal{CG} before exiting it.

Let us show that a strategy $\sigma_0 \in \Sigma_0$ is a solution to the NCNS problem with the threshold $2c$ if and only if it is winning in the given countdown game and threshold c . We first suppose that σ_0 is a winning strategy for player 0 in the countdown game. We consider this strategy in \mathcal{G} and enumerate all possible plays consistent with σ_0 :

- The play $v_0(D)^\omega$ gives the cost $2c$ to player 0, thus satisfying the threshold $2c$,
- No play staying infinitely often in \mathcal{CG} is the outcome of a σ_0 -fixed NE, as it gives an infinite cost to player 2 while player 2 could deviate in v_0 to get a cost of $2c < +\infty$,
- Any play π ultimately reaching E has $\text{cost}_0(\pi) = 2k + 2d$ and $\text{cost}_2(\pi) = 2k + 1$, for some $k \in \mathbb{N}$. If $2k + 2d \leq 2c$, then $\text{cost}_0(\pi)$ satisfies the threshold constraint. Otherwise, $2k + 2d > 2c$, but as σ_0 is winning in the initial countdown game, this means that there

⁸ Classically, the initial configuration is (s_0, c) and the accumulated weight k decreases until being ≤ 0 .

was a previous configuration where the costs of both players 0 and 2 were exactly $2c$. This means that $\text{cost}_2(\pi) = 2k + 1 \geq 2c + 1$, i.e., π is again not a σ_0 -fixed NE outcome.

Assume now that σ_0 is not winning in the countdown game. Hence, there exists a losing play consistent with σ_0 in this game, that leads to a play π in the grey part of Figure 3 such that in none of its vertices, the accumulated weight is exactly $2c$, i.e., there are two consecutive steps where the accumulated weight is $2k < 2c$ and then $2k + 2d > 2c$. So, player 1 can exit between these two steps to reach E . The resulting play π' has $\text{cost}_0(\pi') = 2k + 2d > 2c$ and $\text{cost}_2(\pi') = 2k + 1 < 2c + 1$, thus $\text{cost}_2(\pi') < 2c$. Consequently, π' is a σ_0 -fixed NE outcome but $\text{cost}_0(\pi) > 2c$. It follows that σ_0 is not a solution to the NCNS problem. ◀

6 Conclusion

In this paper, we have determined the exact complexity class for several rational verification and synthesis problems in quantitative reachability games, considering both NE and PO rational behaviors of the environment. However, for the NCNS problem, while we have solved the important one-player environment case, we have left open the multi-player environment case. We believe this latter case poses a significant challenge that may require new advances in automata techniques to be solved.

There are several interesting future works to investigate. (1) We intend to study the FPT complexity of the studied problems. Notice that some of our lower bounds results already hold for one-player environments (see the CNS and UNCNV problems in Section 5). (2) Instead of one reachability objective, player 0 could have several ones and a threshold on these objectives that he wants to see satisfied. (3) The concept of NE could be replaced by SPE or by strong NE (that allows collaborations between the players during deviations). Still, it is important to note that strategies σ_0 that are solutions to the non-cooperative synthesis problems under NE rationality are also solutions under SPE (resp. strong NE) rationality, as SPEs (resp. strong NEs) constitute a subset of NEs.

References

- 1 Shaull Almagor, Orna Kupferman, and Giuseppe Perelli. Synthesis of controllable nash equilibria in quantitative objective game. In Jérôme Lang, editor, *Proceedings of the Twenty-Seventh International Joint Conference on Artificial Intelligence, IJCAI 2018, July 13-19, 2018, Stockholm, Sweden*, pages 35–41. ijcai.org, 2018. URL: <https://doi.org/10.24963/ijcai.2018/5>, doi:10.24963/IJCAI.2018/5.
- 2 Rajeev Alur, Aldric Degorre, Oded Maler, and Gera Weiss. On Omega-Languages Defined by Mean-Payoff Conditions. In Luca de Alfaro, editor, *Foundations of Software Science and Computational Structures, 12th International Conference, FOSSACS 2009, Held as Part of the Joint European Conferences on Theory and Practice of Software, ETAPS 2009, York, UK, March 22-29, 2009. Proceedings*, volume 5504 of *Lecture Notes in Computer Science*, pages 333–347. Springer, 2009. doi:10.1007/978-3-642-00596-1_24.
- 3 Luis Bargañó, Carles Creus, Guillem Godoy, Florent Jacquemard, and Camille Vacher. The Emptiness Problem for Tree Automata with Global Constraints. In *Proceedings of the 25th Annual IEEE Symposium on Logic in Computer Science, LICS 2010, 11-14 July 2010, Edinburgh, United Kingdom*, pages 263–272. IEEE Computer Society, 2010. doi:10.1109/LICS.2010.28.
- 4 Romain Brenguier and Jean-François Raskin. Pareto Curves of Multidimensional Mean-Payoff Games. In Daniel Kroening and Corina S. Pasareanu, editors, *Computer Aided Verification - 27th International Conference, CAV 2015, San Francisco, CA, USA, July 18-24, 2015*,

- Proceedings, Part II*, volume 9207 of *Lecture Notes in Computer Science*, pages 251–267. Springer, 2015. doi:10.1007/978-3-319-21668-3_15.
- 5 Léonard Brice, Jean-François Raskin, and Marie van den Bogaard. Subgame-Perfect Equilibria in Mean-Payoff Games. In Serge Haddad and Daniele Varacca, editors, *32nd International Conference on Concurrency Theory, CONCUR 2021, August 24-27, 2021, Virtual Conference*, volume 203 of *LIPICs*, pages 8:1–8:17. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2021. URL: <https://doi.org/10.4230/LIPICs.CONCUR.2021.8>, doi:10.4230/LIPICs.CONCUR.2021.8.
 - 6 Léonard Brice, Jean-François Raskin, and Marie van den Bogaard. The Complexity of SPEs in Mean-Payoff Games. In Mikolaj Bojanczyk, Emanuela Merelli, and David P. Woodruff, editors, *49th International Colloquium on Automata, Languages, and Programming, ICALP 2022, July 4-8, 2022, Paris, France*, volume 229 of *LIPICs*, pages 116:1–116:20. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2022. URL: <https://doi.org/10.4230/LIPICs.ICALP.2022.116>, doi:10.4230/LIPICs.ICALP.2022.116.
 - 7 Léonard Brice, Jean-François Raskin, and Marie van den Bogaard. Rational Verification for Nash and Subgame-Perfect Equilibria in Graph Games. In Jérôme Leroux, Sylvain Lombardy, and David Peleg, editors, *48th International Symposium on Mathematical Foundations of Computer Science, MFCS 2023, August 28 to September 1, 2023, Bordeaux, France*, volume 272 of *LIPICs*, pages 26:1–26:15. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2023. URL: <https://doi.org/10.4230/LIPICs.MFCS.2023.26>, doi:10.4230/LIPICs.MFCS.2023.26.
 - 8 Thomas Brihaye, Véronique Bruyère, Aline Goeminne, and Jean-François Raskin. Constrained existence problem for weak subgame perfect equilibria with ω -regular Boolean objectives. *Inf. Comput.*, 278:104594, 2021. URL: <https://doi.org/10.1016/j.ic.2020.104594>, doi:10.1016/J.IC.2020.104594.
 - 9 Thomas Brihaye, Véronique Bruyère, Aline Goeminne, Jean-François Raskin, and Marie van den Bogaard. The Complexity of Subgame Perfect Equilibria in Quantitative Reachability Games. In Wan J. Fokkink and Rob van Glabbeek, editors, *30th International Conference on Concurrency Theory, CONCUR 2019, August 27-30, 2019, Amsterdam, the Netherlands*, volume 140 of *LIPICs*, pages 13:1–13:16. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2019. URL: <https://doi.org/10.4230/LIPICs.CONCUR.2019.13>, doi:10.4230/LIPICs.CONCUR.2019.13.
 - 10 Thomas Brihaye, Véronique Bruyère, Aline Goeminne, and Nathan Thomasset. On relevant equilibria in reachability games. *J. Comput. Syst. Sci.*, 119:211–230, 2021. URL: <https://doi.org/10.1016/j.jcss.2021.02.009>, doi:10.1016/J.JCSS.2021.02.009.
 - 11 Thomas Brihaye, Véronique Bruyère, and Gaspard Reghem. Quantitative Reachability Stackelberg-Pareto Synthesis is NEXPTIME-Complete. In Olivier Bournez, Enrico Formenti, and Igor Potapov, editors, *Reachability Problems - 17th International Conference, RP 2023, Nice, France, October 11-13, 2023, Proceedings*, volume 14235 of *Lecture Notes in Computer Science*, pages 70–84. Springer, 2023. doi:10.1007/978-3-031-45286-4_6.
 - 12 Thomas Brihaye, Julie De Pril, and Sven Schewe. Multiplayer Cost Games with Simple Nash Equilibria. In Sergei N. Artëmov and Anil Nerode, editors, *Logical Foundations of Computer Science, International Symposium, LFCS 2013, San Diego, CA, USA, January 6-8, 2013. Proceedings*, volume 7734 of *Lecture Notes in Computer Science*, pages 59–73. Springer, 2013. doi:10.1007/978-3-642-35722-0_5.
 - 13 Thomas Brihaye, Gilles Geeraerts, Axel Haddad, and Benjamin Monmege. To Reach or not to Reach? Efficient Algorithms for Total-Payoff Games. In Luca Aceto and David de Frutos-Escrig, editors, *26th International Conference on Concurrency Theory, CONCUR 2015, Madrid, Spain, September 1-4, 2015*, volume 42 of *LIPICs*, pages 297–310. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2015. URL: <https://doi.org/10.4230/LIPICs.CONCUR.2015.297>, doi:10.4230/LIPICs.CONCUR.2015.297.
 - 14 Thomas Brihaye, Gilles Geeraerts, Axel Haddad, and Benjamin Monmege. Pseudopolynomial iterative algorithm to solve total-payoff games and min-cost reachability games.

- Acta Informatica*, 54(1):85–125, 2017. URL: <https://doi.org/10.1007/s00236-016-0276-z>, doi:10.1007/S00236-016-0276-Z.
- 15 Thomas Brihaye and Aline Goeminne. Multi-weighted Reachability Games. In Olivier Bournez, Enrico Formenti, and Igor Potapov, editors, *Reachability Problems - 17th International Conference, RP 2023, Nice, France, October 11-13, 2023, Proceedings*, volume 14235 of *Lecture Notes in Computer Science*, pages 85–97, Cham, 2023. Springer Nature Switzerland. doi:10.1007/978-3-031-45286-4_7.
 - 16 Thomas Brihaye, Aline Goeminne, James C. A. Main, and Mickael Randour. Reachability Games and Friends: A Journey Through the Lens of Memory and Complexity (Invited Talk). In Patricia Bouyer and Srikanth Srinivasan, editors, *43rd IARCS Annual Conference on Foundations of Software Technology and Theoretical Computer Science, FSTTCS 2023, December 18-20, 2023, IIT Hyderabad, Telangana, India*, volume 284 of *LIPICs*, pages 1:1–1:26. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2023. URL: <https://doi.org/10.4230/LIPICs.FSTTCS.2023.1>, doi:10.4230/LIPICs.FSTTCS.2023.1.
 - 17 Véronique Bruyère. Synthesis of Equilibria in Infinite-Duration Games on Graphs. *ACM SIGLOG News*, 8(2):4–29, may 2021. doi:10.1145/3467001.3467003.
 - 18 Véronique Bruyère, Jean-François Raskin, and Clément Tamines. Stackelberg-Pareto Synthesis. In Serge Haddad and Daniele Varacca, editors, *32nd International Conference on Concurrency Theory, CONCUR 2021, August 24-27, 2021, Virtual Conference*, volume 203 of *LIPICs*, pages 27:1–27:17. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2021. URL: <https://doi.org/10.4230/LIPICs.CONCUR.2021.27>, doi:10.4230/LIPICs.CONCUR.2021.27.
 - 19 Véronique Bruyère, Jean-François Raskin, and Clément Tamines. Pareto-Rational Verification. In Bartek Klin, Slawomir Lasota, and Anca Muscholl, editors, *33rd International Conference on Concurrency Theory, CONCUR 2022, September 12-16, 2022, Warsaw, Poland*, volume 243 of *LIPICs*, pages 33:1–33:20. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2022. doi:10.4230/LIPICs.CONCUR.2022.33.
 - 20 Krishnendu Chatterjee, Laurent Doyen, Thomas A. Henzinger, and Jean-François Raskin. Generalized Mean-payoff and Energy Games. In Kamal Lodaya and Meena Mahajan, editors, *IARCS Annual Conference on Foundations of Software Technology and Theoretical Computer Science, FSTTCS 2010, December 15-18, 2010, Chennai, India*, volume 8 of *LIPICs*, pages 505–516. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2010. URL: <https://doi.org/10.4230/LIPICs.FSTTCS.2010.505>, doi:10.4230/LIPICs.FSTTCS.2010.505.
 - 21 Rodica Condurache, Emmanuel Filiot, Raffaella Gentilini, and Jean-François Raskin. The Complexity of Rational Synthesis. In Ioannis Chatzigiannakis, Michael Mitzenmacher, Yuval Rabani, and Davide Sangiorgi, editors, *43rd International Colloquium on Automata, Languages, and Programming, ICALP 2016, July 11-15, 2016, Rome, Italy*, volume 55 of *LIPICs*, pages 121:1–121:15. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2016. doi:10.4230/LIPICs.ICALP.2016.121.
 - 22 A. Ehrenfeucht and J. Mycielski. Positional strategies for mean payoff games. *International Journal of Game Theory*, 8(2):109–113, jun 1979. doi:10.1007/BF01768705.
 - 23 Diego Figueira and Leonid Libkin. Path Logics for Querying Graphs: Combining Expressiveness and Efficiency. In *Annual ACM/IEEE Symposium on Logic in Computer Science (LICS)*, Kyoto, Japan, July 2015. IEEE. URL: <https://hal.science/hal-01778476>, doi:10.1109/LICS.2015.39.
 - 24 Nathanaël Fijalkow and Florian Horn. Les jeux d’accessibilité généralisée. *Tech. Sci. Informatiques*, 32(9-10):931–949, 2013. URL: <https://doi.org/10.3166/tsi.32.931-949>, doi:10.3166/TSI.32.931-949.
 - 25 Emmanuel Filiot, Raffaella Gentilini, and Jean-François Raskin. The Adversarial Stackelberg Value in Quantitative Games. In Artur Czumaj, Anuj Dawar, and Emanuela Merelli, editors, *47th International Colloquium on Automata, Languages, and Programming (ICALP 2020)*, volume 168 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 127:1–127:18,

- Dagstuhl, Germany, 2020. Schloss Dagstuhl–Leibniz-Zentrum für Informatik. URL: <https://drops.dagstuhl.de/opus/volltexte/2020/12534>, doi:10.4230/LIPIcs.ICALP.2020.127.
- 26 Dana Fisman, Orna Kupferman, and Yoav Lustig. Rational Synthesis. In Javier Esparza and Rupak Majumdar, editors, *Tools and Algorithms for the Construction and Analysis of Systems, 16th International Conference, TACAS 2010, Held as Part of the Joint European Conferences on Theory and Practice of Software, ETAPS 2010, Paphos, Cyprus, March 20–28, 2010. Proceedings*, volume 6015 of *Lecture Notes in Computer Science*, pages 190–204. Springer, 2010. doi:10.1007/978-3-642-12002-2_16.
 - 27 Erich Grädel, Wolfgang Thomas, and Thomas Wilke, editors. *Automata, Logics, and Infinite Games: A Guide to Current Research [outcome of a Dagstuhl seminar, February 2001]*, volume 2500 of *Lecture Notes in Computer Science*. Springer, 2002. doi:10.1007/3-540-36387-4.
 - 28 Christophe Grandmont. Rational Synthesis and Verification in Multiplayer Reachability Games Played on Graphs. Master’s thesis, UMONS, June 2023.
 - 29 Julian Gutierrez, Muhammad Najib, Giuseppe Perelli, and Michael J. Wooldridge. Automated temporal equilibrium analysis: Verification and synthesis of multi-player games. *Artif. Intell.*, 287:103353, 2020. URL: <https://doi.org/10.1016/j.artint.2020.103353>, doi:10.1016/J.ARTINT.2020.103353.
 - 30 Julian Gutierrez, Muhammad Najib, Giuseppe Perelli, and Michael J. Wooldridge. On the complexity of rational verification. *Ann. Math. Artif. Intell.*, 91(4):409–430, 2023. URL: <https://doi.org/10.1007/s10472-022-09804-3>, doi:10.1007/S10472-022-09804-3.
 - 31 David Hyland, Julian Gutierrez, Shankaranarayanan Krishna, and Michael J. Wooldridge. Rational verification with quantitative probabilistic goals. In Mehdi Dastani, Jaime Simão Sichman, Natasha Alechina, and Virginia Dignum, editors, *Proceedings of the 23rd International Conference on Autonomous Agents and Multiagent Systems, AAMAS 2024, Auckland, New Zealand, May 6–10, 2024*, pages 871–879. ACM, 2024. URL: <https://dl.acm.org/doi/10.5555/3635637.3662941>, doi:10.5555/3635637.3662941.
 - 32 Marcin Jurdzinski, Francois Laroussinie, and Jeremy Sproston. Model Checking Probabilistic Timed Automata with One or Two Clocks. *Logical Methods in Computer Science*, Volume 4, Issue 3, September 2008. URL: <https://lmcs.episciences.org/988>, doi:10.2168/LMCS-4(3:12)2008.
 - 33 Richard M. Karp. Reducibility Among Combinatorial Problems. In Raymond E. Miller and James W. Thatcher, editors, *Proceedings of a symposium on the Complexity of Computer Computations, held March 20–22, 1972, at the IBM Thomas J. Watson Research Center, Yorktown Heights, New York, USA*, The IBM Research Symposia Series, pages 85–103. Plenum Press, New York, 1972. doi:10.1007/978-1-4684-2001-2_9.
 - 34 Leonid Khachiyan, Endre Boros, Konrad Borys, Khaled M. Elbassioni, Vladimir Gurvich, Gábor Rudolf, and Jihui Zhao. On Short Paths Interdiction Problems: Total and Node-Wise Limited Interdiction. *Theory Comput. Syst.*, 43(2):204–233, 2008. URL: <https://doi.org/10.1007/s00224-007-9025-6>, doi:10.1007/S00224-007-9025-6.
 - 35 Felix Klaedtke and Harald Rueß. Monadic Second-Order Logics with Cardinalities. In Jos C. M. Baeten, Jan Karel Lenstra, Joachim Parrow, and Gerhard J. Woeginger, editors, *Automata, Languages and Programming*, pages 681–696, Berlin, Heidelberg, 2003. Springer Berlin Heidelberg.
 - 36 Orna Kupferman, Giuseppe Perelli, and Moshe Y. Vardi. Synthesis with Rational Environments. In Nils Bulling, editor, *Multi-Agent Systems - 12th European Conference, EUMAS 2014, Prague, Czech Republic, December 18–19, 2014, Revised Selected Papers*, volume 8953 of *Lecture Notes in Computer Science*, pages 219–235. Springer, 2014. doi:10.1007/978-3-319-17130-2_15.
 - 37 Orna Kupferman and Noam Shenwald. The Complexity of LTL Rational Synthesis. In Dana Fisman and Grigore Rosu, editors, *Tools and Algorithms for the Construction and Analysis of Systems*, pages 25–45, Cham, 2022. Springer International Publishing.
 - 38 Marvin L Minsky. Recursive unsolvability of Post’s problem of "tag" and other topics in theory of Turing machines. *Annals of Mathematics*, pages 437–455, 1961.

- 39 John F. Nash. Equilibrium points in n -person games. *Proceedings of the National Academy of Sciences of the United States of America*, 36:48–49, 1950. URL: <https://doi.org/10.1073/pnas.36.1.48>.
- 40 Martin J. Osborne. *An introduction to game theory*. Oxford Univ. Press, 2004.
- 41 Christos H. Papadimitriou and Mihalis Yannakakis. On the Approximability of Trade-offs and Optimal Access of Web Sources. In *41st Annual Symposium on Foundations of Computer Science, FOCS 2000, 12-14 November 2000, Redondo Beach, California, USA*, pages 86–92. IEEE Computer Society, 2000. doi:10.1109/SFCS.2000.892068.
- 42 Amir Pnueli and Roni Rosner. On the Synthesis of a Reactive Module. In *Conference Record of the Sixteenth Annual ACM Symposium on Principles of Programming Languages, Austin, Texas, USA, January 11-13, 1989*, pages 179–190. ACM Press, 1989. doi:10.1145/75277.75293.
- 43 Senthil Rajasekaran, Suguman Bansal, and Moshe Y. Vardi. Multi-Agent Systems with Quantitative Satisficing Goals. In *Proceedings of the Thirty-Second International Joint Conference on Artificial Intelligence, IJCAI 2023, 19th-25th August 2023, Macao, SAR, China*, pages 280–288. ijcai.org, 2023. URL: <https://doi.org/10.24963/ijcai.2023/32>, doi:10.24963/IJCAI.2023/32.
- 44 Mickael Randour. Games with multiple objectives. In Nathanaël Fijalkow, editor, *Games on Graphs*. Online, 2023. doi:10.48550/arxiv.2305.10546.
- 45 Mickael Randour, Jean-François Raskin, and Ocan Sankur. Percentile queries in multi-dimensional Markov decision processes. *Formal Methods Syst. Des.*, 50(2-3):207–248, 2017. URL: <https://doi.org/10.1007/s10703-016-0262-7>, doi:10.1007/S10703-016-0262-7.
- 46 Larry J. Stockmeyer. The polynomial-time hierarchy. *Theoretical Computer Science*, 3(1):1–22, 1976. URL: <https://www.sciencedirect.com/science/article/pii/030439757690061X>, doi:[https://doi.org/10.1016/0304-3975\(76\)90061-X](https://doi.org/10.1016/0304-3975(76)90061-X).
- 47 Stephen Travers. The complexity of membership problems for circuits over sets of integers. *Theoretical Computer Science*, 369(1):211–229, 2006. URL: <https://www.sciencedirect.com/science/article/pii/S0304397506005585>, doi:<https://doi.org/10.1016/j.tcs.2006.08.017>.

A Example of a Nondeterministic Mealy Machine and Product Game

We first provide an example of a nondeterministic Mealy machine and the way it encodes strategies.


► **Example 13.** Consider the arena in Figure 4 and the nondeterministic Mealy machine \mathcal{M}_0 of player 0 illustrated in Figure 5, formally defined as $\mathcal{M}_0 = (M, m_0, \delta, \tau)$ such that

- $M = \{m_0, m_1\}$,
- $\delta(m_0, v_3) = \{m_0, m_1\}$ and $\delta(m, v) = \{m\}$ for every $(m, v) \neq (m_0, v_3)$,
- $\tau(m_0, v) = \begin{cases} \{v_1, v_3\} & \text{if } v = v_1 \\ \{v_3\} & \text{if } v = v_2 \end{cases}$, and $\tau(m_1, v) = \{v_2\}$ if $v = v_1$ or $v = v_2$.


The idea is to start and stay in the memory state m_0 and then, once v_3 has been visited, to nondeterministically switch to the memory state m_1 , or continue staying in the memory state m_0 . The memory state defines which edge player 0 is able to choose from v_1 : either a nondeterministic choice between v_1 and v_3 in m_0 , or v_2 in m_1 .

We now formally define the notion of product arena. Let $\mathcal{A} = (V, E, \mathcal{P}, (V_i)_{i \in \mathcal{P}}, (w_i)_{i \in \mathcal{P}})$ be a weighted arena and $\mathcal{M}_j = (M, m_0, \delta, \tau)$ be a (nondeterministic) Mealy machine for player $j \in \mathcal{P}$. Then, the *product arena* $\mathcal{A} \times \mathcal{M}_j$ is the weighted arena $\mathcal{A} \times \mathcal{M}_j = (V', E', \mathcal{P}, (V'_i)_{i \in \mathcal{P}}, (w'_i)_{i \in \mathcal{P}})$ where


- $V' = (V \times M) \cup (V \times V \times M)$,
- $V'_i = V_i \times M$ for all $i \in \mathcal{P} \setminus \{j\}$, and $V'_j = (V_j \times M) \cup (V \times V \times M)$,



■ **Figure 4** An arena with player 0, player \square , and player \diamond , with no weight displayed.

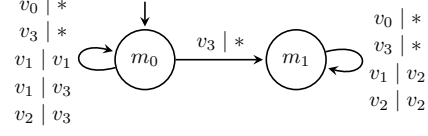

■ **Figure 5** A nondeterministic Mealy machine of player 0. The notation $v | v'$ on the transitions (m, m') indicates that $m' \in \delta(m, v)$, and if $v \in V_0$, that $v' \in \tau(m, v)$, otherwise $v' = *$.

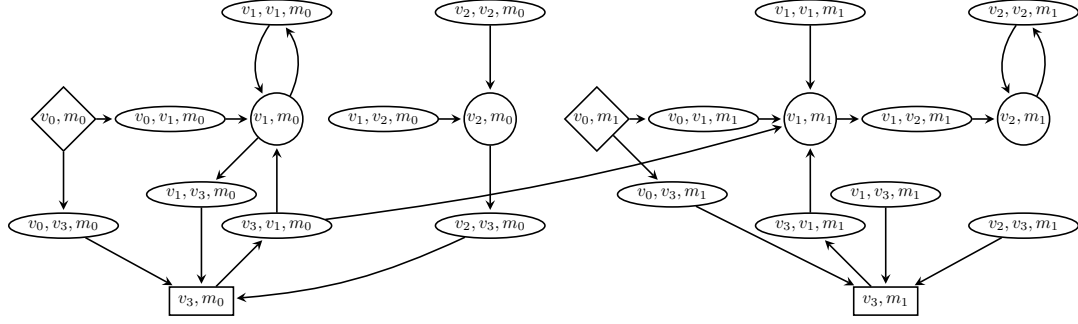

■ **Figure 6** The product arena of the arena in Figure 4 and the Mealy machine in Figure 5.

- E' is the set of edges defined as
 - $(v, m) \rightarrow (v, v', m)$ if $(v, v') \in E$, and when $v \in V_j$, it must hold that $v' \in \tau(m, v)$,
 - $(v, v', m) \rightarrow (v', m')$ if $m' \in \delta(m, v)$,
- For the edges $e' \in E'$ of the form $(v, m) \rightarrow (v, v', m)$, $w'_i(e') = w_i((v, v'))$, while for the edges e' of the form $(v, v', m) \rightarrow (v', m')$, $w'_i(e') = 0$, for all players $i \in \mathcal{P}$.

Intuitively, in vertices (v, v', m) , it is player j who decides how to update the memory state m according to δ .

When \mathcal{A} is initialized with v_0 as initial vertex, then the product arena is also initialized with (v_0, m_0) as initial vertex. Given a reachability game $\mathcal{G} = (\mathcal{A}, (T_i)_{i \in \mathcal{P}})$, we also define the *product game* $\mathcal{G} \times \mathcal{M}_j$ as the reachability game $(\mathcal{A} \times \mathcal{M}_j, (T'_i)_{i \in \mathcal{P}})$ such that $T'_i = T_i \times M$ for all $i \in \mathcal{P}$.


Back to Example 13, the product arena $\mathcal{A}' = \mathcal{A} \times \mathcal{M}_0$ is depicted in Figure 6. We can see that player 0 has several strategies $\sigma_0 \in \llbracket \mathcal{M}_0 \rrbracket$ whose behavior changes according to the memory state m_0 or m_1 .

B Undecidability

This section aims at proving the undecidability results described in Theorem 4 for the NCNS and NCPS problems.

► **Theorem 4.** *With integer weight functions, the Non-Cooperative Nash Synthesis problem and the Non-Cooperative Pareto Synthesis problem are undecidable.*

For that purpose, we use a reduction from zero-sum multidimensional shortest path games, that we recall here. We consider an arena $\mathcal{A} = (V, E, \{Eve, Adam\}, V_{Eve}, V_{Adam}, (w_i)_{i \in \{1, \dots, t\}})$ with two players, *Eve* and *Adam* and k weight functions such that for all $i \in \{1, \dots, t\}$,

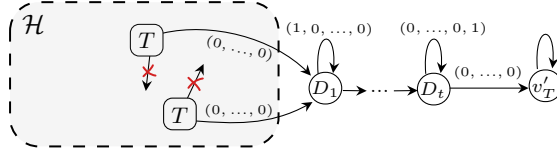

■ **Figure 7** Reduction from the SP problem to the ESP problem.

$w_i : E \rightarrow \mathbb{Z}$. We then consider a zero-sum $\mathcal{G} = (\mathcal{A}, \Omega)$ whose objective Ω (for *Eve*) is to reach a target set⁹ $T \subseteq V$. Such a game is called a *zero-sum multidimensional shortest path game* [44]. For a play $\pi = \pi_0\pi_1\dots$, we define $\text{cost}(\pi) = (+\infty)^t$ if π does not visit T , and $\text{cost}(\pi) = (\text{cost}_1(\pi), \dots, \text{cost}_t(\pi))$, where $\text{cost}_i(\pi) = \sum_{k=1}^{\ell} w_i(\pi_{k-1}, \pi_k)$ and $\ell = \inf\{n \in \mathbb{N} \mid \pi_n \in T\}$ otherwise. The *Shortest Path problem* (SP problem) (resp. *Equality Shortest Path problem* (ESP problem)) asks, given such a multidimensional shortest path game, an initial vertex v_0 , and a threshold $\bar{c} \in \mathbb{Z}^k$, whether there exists a strategy σ_{Eve} of *Eve* such that for every strategy σ_{Adam} of *Adam*, $\text{cost}(\langle \sigma_{Eve}, \sigma_{Adam} \rangle_{v_0}) \leq \bar{c}$ (resp. $\text{cost}(\langle \sigma_{Eve}, \sigma_{Adam} \rangle_{v_0}) = \bar{c}$).¹⁰ The SP problem is PSPACE-complete [15] with weight functions $E \rightarrow \mathbb{N}$ and thresholds $\bar{c} \in \mathbb{N}^k$. It is in general undecidable [44, 45], even with $\bar{c} = (0, \dots, 0)$, by reduction from the halting problem of two-counter machines, known to be undecidable [38]. We additionally show that the ESP problem is undecidable by a reduction from the SP problem.

► **Theorem 14.** *The Equality Shortest Path problem is undecidable.*

Proof. We show the undecidability of the ESP problem by reduction from the SP problem with the threshold $\bar{c} = \bar{0}$. Let $\mathcal{H} = (\mathcal{A}, \Omega)$ be a multidimensional shortest path game, with the arena $\mathcal{A} = (V, E, \{Eve, Adam\}, V_{Eve}, V_{Adam}, (w_i)_{i \in \{1, \dots, t\}})$, the target set T , the initial vertex $v_0 \in V$, and the threshold $\bar{0}$. We construct a new shortest path game $\mathcal{H}' = (\mathcal{A}', \Omega')$ with the arena $\mathcal{A}' = (V', E', \{Eve, Adam\}, V'_{Eve}, V'_{Adam}, (w'_i)_{i \in \{1, \dots, t\}})$ illustrated in Figure 7, the target set T' , the same initial vertex $v_0 \in V$, and the same threshold \bar{c} , where

- $V' = V \cup \{D_1, \dots, D_t, v_{T'}\}$,
- $V'_{Eve} = V_{Eve} \cup \{D_1, \dots, D_t, v_{T'}\}$, $V'_{Adam} = V_{Adam}$,
- the set E' is composed of the edges of E , except that $\text{succ}(v) = \{D_1\}$ for every vertex $v \in T$; E' also contains the new edges (D_i, D_{i+1}) for $i \in \{1, \dots, t-1\}$, (D_i, D_i) for $i \in \{1, \dots, t\}$, $(D_t, v_{T'})$, and $(v_{T'}, v_{T'})$,
- for every $i \in \{1, \dots, t\}$, $w'_i(e) = w_i(e)$ if $e \in E$, and w'_i assigns 0 to each added edge, except $w_i((D_i, D_i)) = 1$,
- $T' = \{v_{T'}\}$.

Let us show that *Eve* is winning for the SP problem in \mathcal{H} with the threshold $\bar{0}$ if and only if she is winning for the ESP problem in \mathcal{H}' with the same threshold.


Suppose that *Eve* has a winning strategy σ_{Eve} in \mathcal{H} for the SP problem. Thus, every play consistent with σ_{Eve} has a prefix h ending in T , with $\text{cost}(h) \leq \bar{0}$. We define a strategy for *Eve* in \mathcal{H}' by simulating σ_{Eve} in \mathcal{H} and by extending it after each such history h in a way that the resulting consistent play π' satisfies $\text{cost}(\pi') = \bar{0}$ (for each $i \in \{1, \dots, t\}$, loop on D_i exactly $-\text{cost}_i(h)$ times).

Conversely, suppose that *Eve* has a winning strategy σ'_{Eve} to win in \mathcal{H}' , and let us simulate this strategy in \mathcal{H} for histories both in \mathcal{H} and \mathcal{H}' . By hypothesis, every play π' consistent

⁹ This target set is unique, contrarily to the particular games introduced in Section 4.2.

¹⁰ Recall that we consider here the componentwise partial order over $(\mathbb{Z} \cup \{+\infty\})^t$.

with σ'_{Eve} is such that $\text{cost}(\pi') = \bar{0}$. So, by construction, there is a prefix h' of π' ending in T such that, in \mathcal{H} , $\text{cost}(h') \leq \bar{0}$ holds. Once T is reached by h' , we extend the new strategy arbitrarily in \mathcal{H} . \blacktriangleleft

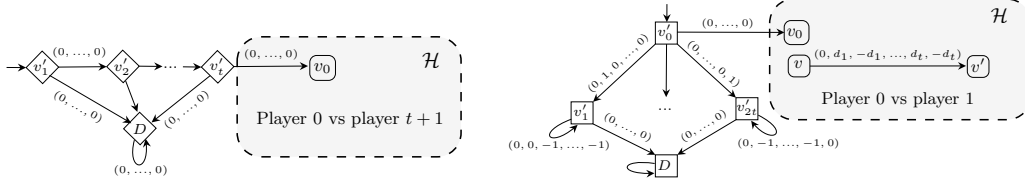

■ **Figure 8** Reduction from the SP problem to the NCNS problem. ■ **Figure 9** Reduction from the ESP problem to the NCNS problem.

Proof of Theorem 4. (1) We first show the undecidability of the NCNS problem by reduction from the complement of the SP problem. Let $\mathcal{H} = (\mathcal{A}, \Omega)$ be a multidimensional shortest path game, with the arena $\mathcal{A} = (V, E, \{Eve, Adam\}, V_{Eve}, V_{Adam}, (w_i)_{i \in \{1, \dots, t\}})$, the target set T , and the initial vertex $v_0 \in V$. We construct a reachability game $\mathcal{G}' = ((V', E', \mathcal{P}, (V'_i)_{i \in \mathcal{P}}, (w'_i)_{i \in \mathcal{P}}, (T'_i)_{i \in \mathcal{P}})$ with $t + 2$ players as illustrated in Figure 8, where:

- $\mathcal{P} = \{0, \dots, t + 1\}$,
- $V' = V \cup \{v'_1, \dots, v'_t, D\}$,
- $V'_i = \{v'_i\}$ for all $i \in \mathcal{P} \setminus \{0, t + 1\}$, $V'_0 = V_{Adam}$, and $V'_{t+1} = V_{Eve}$,
- $E' = E \cup \{(v'_i, v'_{i+1}), (v_i, D) \mid i \in \{1, \dots, t-1\}\} \cup \{(v'_t, D), (D, D), (v'_t, v_0)\}$,
- the functions w'_i , for all $i \in \mathcal{P} \setminus \{0, t + 1\}$, are the same as w_i in \mathcal{H} and assign 0 on the added edges, and the functions $w_0 = w_{t+1}$ both assign 0 to every edge of E' ,
- $T'_i = T \cup \{D\}$ for all $i \in \mathcal{P} \setminus \{0, t + 1\}$, $T'_0 = \{D\}$ and $T'_{t+1} = V'$.

From the initial vertex v'_1 , each player $1, \dots, t$ has the choice to go to D (and thus giving a zero cost to everybody) or to go to the game \mathcal{H} . In \mathcal{H} , player 0 has the role of *Adam* and always gets an infinite cost (he gets a zero cost outside \mathcal{H}), while player $t + 1$ has the role of *Eve* and always gets a zero cost (even outside \mathcal{H}). Let us prove that there exists a solution to the NCNS problem in \mathcal{G}' with the threshold $c' = 0$ if and only if *Adam* has a winning strategy in \mathcal{H} with the threshold $\bar{c} = \bar{0}$.

If there exists a strategy σ_0 solution to the NCNS problem, it means that for every σ_0 -fixed NE outcome π' , $\text{cost}_0(\pi') \leq 0$ holds. From σ_0 , we can construct a strategy σ_{Adam} for *Adam*. Let σ_{Eve} be any strategy for *Eve*. These two strategies generate a play π in \mathcal{H} (from v_0), leading to the play $\pi' = v'_1 \dots v'_t \cdot \pi$ in \mathcal{G}' . By construction, this play π' is not a 0-fixed NE outcome as π' is consistent with σ_0 and $\text{cost}_0(\pi') = +\infty$. Therefore, some player, say player i , has a profitable deviation along π' . As player $t + 1$ has no profitable deviation (he gets a zero cost for all plays), it follows that $i \in \{1, \dots, t\}$. That deviation must occur in vertex v'_i as it is the only vertex controlled by player i along π' . Therefore, the deviating play gives a zero cost for player i , meaning that $\text{cost}_i(\pi') > 0$. Hence, we get $\text{cost}_i(\pi) > 0$ in \mathcal{H} . This shows that σ_{Adam} is a winning strategy for *Adam* in \mathcal{H} .

Suppose now that σ_{Adam} is a winning strategy for *Adam* in \mathcal{H} . Let σ_0 be a strategy of player 0 in \mathcal{G}' , which corresponds to the strategy σ_{Adam} . By contradiction, suppose that σ_0 is not a solution to the NCNS problem, i.e., there exists a σ_0 -fixed NE outcome π' such that $\text{cost}_0(\pi') > 0$. As $T'_0 = \{D\}$, it means that $\pi' = v'_1 \dots v'_t \cdot \pi$, with π a play in \mathcal{H} consistent with σ_{Adam} , thus such that $\text{cost}_i(\pi) > 0$ for some $i \in \{1, \dots, t\}$. This is in contradiction with π' being a σ_0 -fixed NE outcome, as player i has a profitable deviation in v'_i .

(2) We then show the undecidability of the NCPS problem by reduction from the complement of the ESP problem. Let again $\mathcal{H} = (\mathcal{A}, \Omega)$ be a multidimensional shortest path game. We now construct a reachability game $\mathcal{G}' = ((V', E', V'_0, V'_1, (w'_i)_{i \in \{0, \dots, 2t\}}), (T'_i)_{i \in \{0, \dots, 2t\}})$ with two players 0 and 1, and $2t$ reachability objectives from player 1, as illustrated in Figure 9, where:

- $V' = V \cup \{v'_0, v'_1, \dots, v'_{2t}, D\}$,
- $E' = E \cup \{(v'_0, v_0), (D, D)\} \cup \{(v'_0, v'_i), (v'_i, v'_i), (v'_i, D) \mid i \in \{1, \dots, 2t\}\}$,
- $V'_0 = V_{Adam}, V'_1 = V_{Eve} \cup \{v'_0, v'_1, \dots, v'_{2t}, D\}$,
- the weight function w'_0 is null; for each $i \in \{1, \dots, 2t\}$, we have
 - for each $e \in E$, $w'_i(e) = w_{(i+1)/2}(e)$ if i is odd, and $w'_i(e) = -w_{i/2}(e)$ if i is even,
 - $w'_i((v'_j, D)) = w'_i((D, D)) = 0$,
 - and

$$w'_i((v'_0, v'_j)) = \begin{cases} 1 & \text{if } j = i, \\ 0 & \text{if } j \neq i, \end{cases} \quad w'_i((v'_j, v'_j)) = \begin{cases} 0 & \text{if } j = i, \\ -1 & \text{if } j \neq i, \end{cases}$$

- $T'_0 = \{D\}, T'_i = T \cup \{D\}$ for each $i \in \{1, \dots, 2t\}$.

We denote by cost' the cost function in \mathcal{G}' . Hence, a weight tuple (d_1, d_2, \dots, d_t) labeling an edge in \mathcal{H} is replaced by the weight tuple $(0, d_1, -d_1, d_2, -d_2, \dots, d_t, -d_t)$ in the new game. Moreover, a play π in \mathcal{H} with $\text{cost}(\pi) = (c_1, c_2, \dots, c_t) \in (\mathbb{Z} \cup \{+\infty\})^t$ has a cost for player 1 in \mathcal{G}' equal to $\text{cost}'_{\text{env}}(\pi) = (c_1, -c_1, c_2, -c_2, \dots, c_t, -c_t)$ if π visits T and $(+\infty, \dots, +\infty)$ otherwise. Note that any play π' in the left part of \mathcal{G}' that visits D has a cost for player 1 of the form $(-c, \dots, -c, 1, -c, \dots, -c)$ where $c \in \mathbb{N}$ can be arbitrarily large.

Let us prove that there exists a solution to the NCPS problem in \mathcal{G}' with the initial vertex v'_0 and the threshold $c = 0$ if and only if *Adam* has a winning strategy in \mathcal{H} for the ESP problem with the threshold $\bar{c} = \bar{0}$.

If *Adam* has a winning strategy σ_{Adam} in \mathcal{H} , then player 0 can construct a strategy σ_0 in \mathcal{G}' that simulates σ_{Adam} . Hence, every play π consistent with σ_0 going to the right part of \mathcal{G}' satisfies $\text{cost}'_{\text{env}}(\pi) \neq (0, \dots, 0)$, i.e., either $\text{cost}'_{\text{env}}(\pi) = (+\infty, \dots, +\infty)$ or there exists two consecutive indices, say i and $i+1$, such that $\text{cost}'_i(\pi), \text{cost}'_{i+1}(\pi) \in \mathbb{Z}$ and $\text{cost}'_{i+1}(\pi) = -\text{cost}'_i(\pi)$. W.l.o.g, suppose that $\text{cost}'_i(\pi) > 0$. Consequently, there is a play $\pi' = v'_0(v'_i)^c D^\omega$ for some large enough $c \in \mathbb{N}$ such that $\text{cost}'_{\text{env}}(\pi') = (-c, \dots, -c, 1, -c, \dots, -c) < \text{cost}'_{\text{env}}(\pi)$. It means that there is no σ_0 -fixed PO play going to the right part of \mathcal{G}' . Therefore, σ_0 is solution to the NCPS problem since if there exists a σ_0 -fixed PO play, it must visit D , leading to a zero cost to player 0.¹¹

Conversely, if *Eve* has a winning strategy σ_{Eve} for the ESP problem in \mathcal{H} , then for all strategies σ_0 of player 0, player 1 has a strategy σ_1 that mimics σ_{Eve} to generate a play π going to the right part of \mathcal{G}' with $\text{cost}'_{\text{env}}(\pi) = (0, \dots, 0)$. As for every play π' visiting D (in the left part of \mathcal{G}'), there exists $i \in \{1, \dots, 2t\}$ such that $\text{cost}'_i(\pi') = 1$, it follows that π is a σ_0 -fixed PO play, but does not visit T_0 . Consequently, the instance of the NCPS is false. ◀

C Lower Bounds for Pareto Optimality

We prove the lower bounds of Theorem 2 for *qualitative* reachability. As a corollary, for the problems studied in this paper, we get the same complexity class for quantitative reachability

¹¹ Note that there is no σ_0 -fixed PO play, making σ_0 trivially a solution to the NCPS problem.

as for qualitative reachability.

In the following proofs, it is important to recall that in qualitative reachability games, the weight of all edges is $(0, \dots, 0)$. Hence, $\text{cost}_i(\pi) = 0$ if the play π visits the target set T_i , and $+\infty$ otherwise. In particular, we can always set the threshold c to 0. In the sequel, instead of using the notation $\text{cost}_i(\pi) = 0$, we will say that T_i is visited.

C.1 Lower bound for the NCPV problem

We begin with the lower bound of Theorem 2.a.

► **Theorem 15.** *The Non-Cooperative Pareto Verification problem is Π_2^P -hard.*

We show that there exists a polynomial reduction from a variant of the Σ_2 QBF problem to the complementary of the NCPV problem. Given a Boolean formula φ in 3DNF on the set of variables $X \cup Y$, with X and Y being disjoint, the Σ_2 QBF problem asks whether there exists a valuation val_X of variables of X such that for every valuation val_Y of variables of Y , the valuation $(\text{val}_X, \text{val}_Y)$ satisfies φ . In other words,

$$\exists X \forall Y [\varphi(X, Y) = 1].$$

This problem is known to be Σ_2^P -complete [46]. The variant, that we call Σ_2 QBF^{neg} problem, asks whether φ in 3CNF is not satisfied, i.e.,

$$\exists X \forall Y [\varphi(X, Y) = 0].$$

► **Corollary 16.** *The Σ_2 QBF^{neg} problem with a 3CNF formula φ is Σ_2^P -complete.*

We are going to show that the Σ_2 QBF^{neg} problem reduces to the coNCPV problem (with threshold $c = 0$). Hence the NCPV problem will be Π_2^P -hard. Recall that in this case, player 1 is the only one to play. Our goal is then to show that there exists a PO play π not visiting T_0 if and only if the Σ_2 QBF^{neg} instance is satisfied. Let $X = \{x_1, \dots, x_n\}$, $Y = \{y_1, \dots, y_m\}$ be two sets of distinct variables and φ be a 3CNF Boolean formula on $X \cup Y$, i.e., in the form


$$\varphi = C_1 \wedge \dots \wedge C_k, \quad \text{and} \quad \forall i, C_i = (\ell_{i,1} \vee \ell_{i,2} \vee \ell_{i,3}),$$

where $\ell_{i,j}$ is a literal, representing either a variable $v \in X \cup Y$, or its negation $\neg v$.

The intuition of the reduction is the following one (see Figure 10). From φ , we build two subarenas, arena \mathcal{A}_1 where player 1 is “happy” except for one particular target T_1 and where player 0 never visits his target, and arena \mathcal{A}_2 where player 0 always visits his target and player 1 visits some targets according to which clauses of φ are satisfied. There are two types of targets: (i) some to force a specific val_X to be considered and (ii) some to check if a clause C_i is satisfied. In \mathcal{A}_1 , any play represents a valuation of X , and in \mathcal{A}_2 , any play represents a valuation of $X \cup Y$. The idea is to make one clause always false when a valuation val_X is taken in \mathcal{A}_2 , in a way that we get an incomparable cost with the same valuation in \mathcal{A}_1 .

Proof of Theorem 15. Let us first describe the arena of the game and its target sets. All vertices are owned by player 1 who is thus the only one to play. The initial vertex is v_0 with an edge to v_1 to enter \mathcal{A}_1 and an edge to v_2 to enter \mathcal{A}_2 . There are $1 + 2n + k$ target sets $(T_1, T_{x_1}, T_{\neg x_1}, \dots, T_{x_n}, T_{\neg x_n}, T_{C_1}, \dots, T_{C_k})$ for player 1 and the target set T_0 for player 0:

- $T_0 = T_1 = \{v_2\}$,
- for all $i \leq n$, $T_{x_i} = \{x_i^1, x_i^2\}$, $T_{\neg x_i} = \{\neg x_i^1, \neg x_i^2\}$,
- for all $i \leq k$, $T_{C_i} = \{v_1, \ell_{i,1}^2, \ell_{i,2}^2, \ell_{i,3}^2\}$, where $\ell_{i,j}^2$ is the literal vertex in \mathcal{A}_2 representing the j -th literal $\ell_{i,j}$ of C_i .

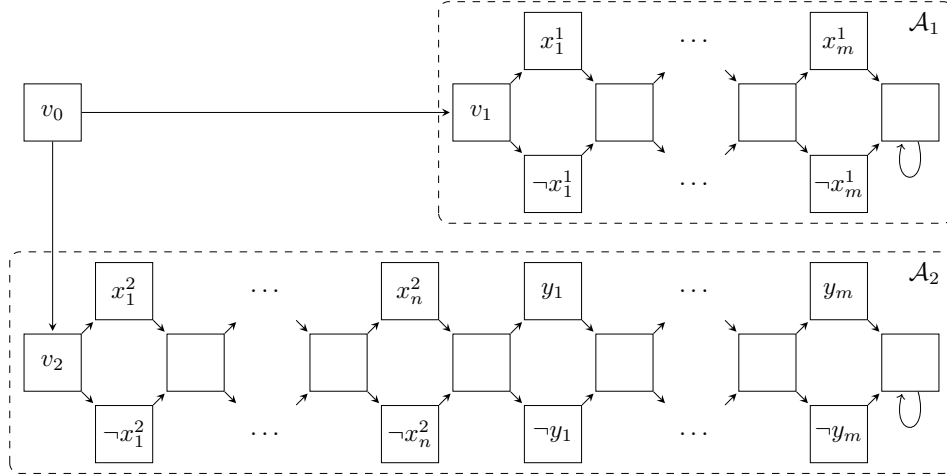

■ **Figure 10** The single-player arena \mathcal{A} used in the reduction from the $\Sigma_2\text{QBF}^{\text{neg}}$ problem.

From the definition of target sets T_{C_i} , any play π in \mathcal{A}_2 corresponds to a valuation of the variables of φ , where T_{C_i} is visited if and only if the clause C_i is satisfied.

Let us assume that the instance of the $\Sigma_2\text{QBF}$ problem is positive. That is, there exists a valuation val_X of the variables in X such that whatever the valuation val_Y of the remaining variables in Y , the formula φ is false. Let π be the play in \mathcal{A}_1 which corresponds to the valuation val_X . It does not visit T_0 , and $\text{cost}_{\text{env}}(\pi) = (+\infty, val_X, 0, \dots, 0)$, where val_X is here expressed as a vector of $2n$ values in $\{0, +\infty\}$ for the targets $T_{x_1}, T_{\neg x_1}, \dots, T_{x_n}, T_{\neg x_n}$.¹² Let us show that π is PO, i.e., no play in \mathcal{A} has a cost strictly smaller than $\text{cost}_{\text{env}}(\pi)$. To avoid plays with incomparable costs, it is enough to consider plays π' in \mathcal{A}_2 which correspond to the same valuation val_X . Such a play π' represents val_X and then some valuation val_Y . Since val_X is a positive instance to the $\Sigma_2\text{QBF}^{\text{neg}}$ problem, for each such play π' , there exists $i \leq m$ such that π' does not visit T_{C_i} , as no valuation of Y together with val_X satisfies φ . It follows that $\text{cost}_{\text{env}}(\pi')$ is incomparable to $\text{cost}_{\text{env}}(\pi)$, as π visits T_{C_i} but π' does not, and π' visits T_1 but π does not. We conclude that π is PO play that does not visit T_0 , i.e., with $\text{cost}_0(\pi) > c = 0$.


Let us now assume that there exists a PO play π in \mathcal{A} not visiting T_0 . It is thus a play in \mathcal{A}_1 that corresponds to a valuation val_X of the variables of X in φ . And there is no play in \mathcal{A}_2 with a strictly smaller cost. It follows that all play in \mathcal{A}_2 corresponding to the same valuation val_X do not visit at least one target T_{C_i} . Therefore, val_X is a positive instance of the $\Sigma_2\text{QBF}^{\text{neg}}$ problem, as for all valuations val_Y of Y , together val_X and val_Y do not satisfy φ . ◀

C.2 Lower bound for the CPS and UNCPV problems

We here prove that both UNCPV and CPS problems are PSPACE-hard (lower bound of Theorem 2.b-c).

► **Theorem 17.** *The Cooperative Pareto Synthesis problem and the Universal Non-Cooperative Pareto Verification problem are both PSPACE-hard.*

¹² Recall: 0 in case of a target visit, and $+\infty$ otherwise.

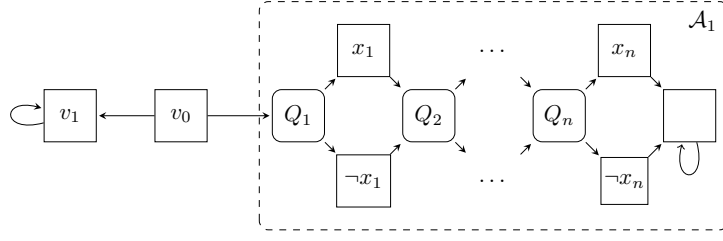

■ **Figure 11** The arena used in the reduction from coQBF.

We first prove the theorem for the CPS problem. We then explain what to modify to get the reduction for the coUNCPV problem. For this purpose, we need to define a variant of the QBF problem: the *coQBF problem with 3CNF formulas*. An instance of this problem is in the form

$$Q_1 x_1 \dots Q_n x_n [\varphi = 0]$$

where φ is a 3CNF formula over the variables $\{x_1, \dots, x_n\}$, and $Q_i \in \{\forall, \exists\}$ for all i .

► **Lemma 18.** *The coQBF problem with 3CNF formulas is PSPACE-complete.*

Proof. The PSPACE-membership is clear by the same algorithm as for QBF. The PSPACE-hardness is obtained through two consecutive reductions. For the first one, given some QBF instance $Q_1 x_1 \dots Q_n x_n [\varphi = 1]$ with φ a 3CNF Boolean formula, we simply construct the negation of this instance:

$$Q'_1 x_1 \dots Q'_n x_n [\neg\varphi = 1],$$

where $Q'_i = \forall$ (resp. $Q'_i = \exists$) if $Q_i = \exists$ (resp. $Q_i = \forall$). Notice that $\neg\varphi$ is a 3DNF formula. For the second reduction from the previous instance, we use the property “ φ is true if and only if $\neg\varphi$ is false”, hence we construct

$$Q'_1 x_1 \dots Q'_n x_n [\neg(\neg\varphi) = 0].$$

This concludes the proof, by $\neg(\neg\varphi) = \varphi$ and by construction. ◀

Proof of Theorem 17. We begin with a reduction from the coQBF problem to the CPS problem (with threshold $c = 0$). Let $Q_1 x_1 \dots Q_n x_n [\varphi = 0]$ be a coQBF instance with $\varphi = C_1 \wedge \dots \wedge C_n$ a 3CNF formula on the set of variables $\{x_1, \dots, x_n\}$ such that $C_i = (\ell_{i,1} \vee \ell_{i,2} \vee \ell_{i,3})$ for all $i \leq n$. We construct an arena \mathcal{A} as shown in Figure 11 with $n + 1$ target sets $(T_1, T_{C_1}, \dots, T_{C_n})$ for the environment:

- $V_0 = \{Q_i \mid Q_i = \exists\}$, $V_1 = V \setminus V_0$, and v_0 is the initial vertex,
- $T_0 = \{v_1\}$,
- $T_1 = \{Q_1\}$, $T_{C_i} = \{v_1, \ell_{i,1}, \ell_{i,2}, \ell_{i,3}\}$ for all $i \leq n$.

Suppose first that the coQBF instance is positive. Let player 0 mimic the behavior of the existential player as a strategy σ_0 in \mathcal{A}_1 and let us show that the play $\pi = v_0(v_1)^\omega$ with $\text{cost}_0(\pi) = 0$ and $\text{cost}_{\text{env}}(\pi) = (+\infty, 0, \dots, 0)$, is σ_0 -fixed PO. Any play π' in \mathcal{A}_1 consistent with σ_0 represents a valuation of φ . By hypothesis, it makes φ unsatisfiable, i.e., there is an unsatisfied clause C_i , meaning that T_{C_i} is not visited by π' . The cost $\text{cost}_{\text{env}}(\pi')$ is incomparable to $\text{cost}_{\text{env}}(\pi)$, as T_{C_i} is visited in π and not in π' , while T_1 is visited in π' and not in π .

Let us suppose that the CPS instance is positive. Then there exists $\sigma_0 \in \Sigma_0$ and a σ_0 -fixed PO play π where $\text{cost}_0(\pi) = 0$. Necessarily, $\pi = v_0(v_1)^\omega$, as this is the only play with a zero cost for player 0. By hypothesis on σ_0 , for any play π' consistent with σ_0 and ending in \mathcal{A}_1 , it is not the case that $\text{cost}_{\text{env}}(\pi') < \text{cost}_{\text{env}}(\pi)$. But since T_1 is visited by π' but not by π , $\text{cost}_{\text{env}}(\pi')$ must be incomparable with $\text{cost}_{\text{env}}(\pi)$, i.e., it cannot visit T_{C_i} , for some i . Therefore, for all such plays π' , i.e., for all responses to the universal player in φ , there exists $i \leq n$ such that C_i is not satisfied, thus making φ unsatisfied.

Finally, let us adapt the previous proof to the coUNCPV problem. We construct the same game except that $T_0 = \{Q_1\}$. The proof remains the same as the play $\pi = v_0(v_1)^\omega$ has now $\text{cost}_0(\pi) = +\infty$. ◀

D Characterization of Nash Equilibria outcomes

For some results of this paper, we need to recall a characterization of NE outcomes for quantitative reachability [10]. This section aims to recall this characterization based on values of some particular two-player zero-sum games. See the survey [17] for more details about this characterization for different kinds of objectives.

Given a reachability game \mathcal{G} and a fixed strategy σ_0 of player 0, we denote by $\text{Val}^*: V \rightarrow \mathbb{N} \cup \{+\infty\}$ the function giving, for any vertex $v \in V_i$, $i \in \mathcal{P} \setminus \{0\}$, the *value* of player i in the zero-sum setting of player i opposed to the *coalition* of the other players, which is the lowest cost, with respect to w_i , that player i can ensure against this coalition. These values can be computed in polynomial time through a value iteration algorithm, and belong to $\{0, \dots, |V|W, +\infty\}$ [12, 14, 34].

Formally, to define the value $\text{Val}_i(v)$ of a vertex v for player i against the coalition $\mathcal{P} \setminus \{0, i\}$ denoted $-i$, we first need to define the *lower value* $\underline{\text{Val}}_i(v)$ and the *upper value* $\overline{\text{Val}}_i(v)$ of a vertex v in the following way:

$$\underline{\text{Val}}_i(v) = \sup_{\sigma_{-i}} \inf_{\sigma_i} \text{cost}_i(\langle \sigma_0, \sigma_i, \sigma_{-i} \rangle_v), \quad \overline{\text{Val}}_i(v) = \inf_{\sigma_i} \sup_{\sigma_{-i}} \text{cost}_i(\langle \sigma_0, \sigma_i, \sigma_{-i} \rangle_v).$$

Then, when for every vertex v , $\underline{\text{Val}}_i(v) = \overline{\text{Val}}_i(v)$ holds, the game is said to be *determined* and the value is $\text{Val}_i(v) = \overline{\text{Val}}_i(v) = \underline{\text{Val}}_i(v)$. This is the case for our reachability games [10]. Then, for each vertex v , we define $\text{Val}^*(v) = \text{Val}_i(v)$ for the player i such that $v \in V_i$.

► **Definition 19.** A play $\pi = \pi_0\pi_1 \dots$ is *Visit Val**-consistent for a set of players $I \subseteq \mathcal{P}$ if for all $i \in I$ and for all $n \in \mathbb{N}$, we have $(\pi_n \in V_i \wedge i \notin \text{Visit}(\pi_{<n})) \Rightarrow \text{cost}_i(\pi_{\geq n}) \leq \text{Val}^*(\pi_n)$.

The next result is a direct corollary of [10, Theorem 15] stating the characterization of NE outcomes. We simply ignore values of player 0 to get the equivalent result for 0-fixed NEs.

► **Proposition 20** ([10]). Let π be a play. Then π is the outcome of a 0-fixed NE if and only if π is *Visit Val**-consistent for the set of players $\mathcal{P} \setminus \{0\}$.

E Complexity of the CNS and (U)NCNV Problems

We study in this section the (U)NCNV and CNS problems (Theorem 3.a-c).

Some results are easily obtained as there already exist similar approaches for closely related problems. This is the case for the CNS problem. For the particular case of qualitative reachability, it is proved in [21] that the CNS problem is NP-complete (by using automata

techniques). This result is extended in [28] for arenas where the weights on the edges are all equal to 1, by using Proposition 20.


We also show two proofs of hardness for the CNS and UNCNV problems, that already hold when the environment is limited to one player. Then, we see how to adapt the work from [7], where the authors proved the coNP-completeness of the (U)NCNV problems when all weights on the edges are equal to 1. The adaptation is nontrivial and requires the use of Parikh automata for the same reason as in Section 4.

► **Theorem 21.** *The Cooperative Nash Synthesis problem for reachability games is NP-complete, even with one-player environments.*


To prove this theorem, we will use the characterization of 0-fixed NE outcomes from Appendix D.

Proof of the upper bound of Theorem 21. We use the same approach as in Lemma 5 to show that, given a Visit Val*-consistent play π for the set of players $\mathcal{P} \setminus \{0\}$, we can build a Visit Val*-consistent play $\pi' = \mu(\nu)^\omega$ for $\mathcal{P} \setminus \{0\}$ where $|\mu\nu|$ is polynomial in $|V|$ and $|\mathcal{P}|$. Thus, we first compute in polynomial time the value of each vertex. Then we guess a lasso $\pi' = \mu(\nu)^\omega$ as above and use Proposition 20 to check in time polynomial in $|V|$ and $|\mathcal{P}|$ whether there exists a strategy σ_0 such that π is a σ_0 -fixed NE since values and weights along π are given in binary. ◀

We now prove the lower bound of Theorem 21, that already holds for one-player environments, with a reduction from the *bi-partition problem* which is known to be NP-complete [33]. Given $S = \{a_1, \dots, a_n\}$ a subset of \mathbb{N} , the bi-partition problem asks whether there exists $A, B \subseteq S$ such that A and B is a partition of S and $\sum_{a_i \in A} a_i = \sum_{a_i \in B} a_i$. Notice that if the answer to this problem is positive, then $T = \sum_{a_i \in S} a_i$ is even. Therefore we can suppose that T is always even, which allows us to work with $T/2 \in \mathbb{N}$.



■ **Figure 12** Reduction for the NP-hardness for the CNS problem with a one-player environment



■ **Figure 13** Reduction for the NP-hardness for the coUNCNV problem with a one-player environment

Proof of the lower bound of Theorem 21. Figure 12 shows the arena used for the reduction from the bi-partition problem to the CNS problem with the threshold $c = T/2$. The target sets for player 0 and player 1 are respectively $T_0 = \{R\}$ and $T_1 = \{L, R\}$.

Suppose that the instance of the bi-partition problem is positive. Player 0 can set a strategy σ_0 such that the play $\pi = v_0 v_1 \dots (R)^\omega$ satisfies $\text{cost}_0(\pi) = \text{cost}_1(\pi) = T/2$. Notice that $\text{cost}_0(\pi) \leq c$ and that π is a σ_0 -fixed NE outcome, because if player 1 deviates at v_0 , then the resulting $\pi' = v_0(L)^\omega$ has $\text{cost}_1(\pi') = T/2$.

Suppose now that there exists a 0-fixed NE outcome π with $\text{cost}_0(\pi) \leq T/2$. Necessarily, it goes to the right and reaches R , since otherwise $\text{cost}_0(\pi) = +\infty$. Moreover, $\text{cost}_1(\pi) \geq T/2$ as $\text{cost}_0(\pi) + \text{cost}_1(\pi) = T$. Finally, since π is a 0-fixed NE outcome, player 1 has no incentive to deviate to the left from v_0 , i.e., $\text{cost}_1(\pi) \leq T/2$. It follows that $\text{cost}_0(\pi) = \text{cost}_1(\pi) = T/2$. ◀

With small adaptations to the previous reduction, we get the coNP-hardness of the UNCNV problem.

► **Corollary 22.** *The Universal Non-Cooperative Nash Verification problem for reachability games is coNP-hard, even with one-player environments.*

Proof. We use the same kind of reduction as for the CNS problem. The game used for the reduction to the coUNCNV problem is illustrated in Figure 13, such that $c = T/2 - 1$ and $T_0 = T_1 = \{L, R\}$.

If there exists a partition $\{A, B\}$ of S such that $\sum_A a_i = \sum_B a_i = T/2$, then we have a play π going to the right where $\text{cost}_0(\pi) = T/2$, $\text{cost}_1(\pi) = nT - T/2 = T/2(2n - 1)$, i.e., π is a 0-fixed NE outcome, so we have finished. For the other direction, if there exists a 0-fixed NE outcome π , this play must go to the right otherwise the cost of player 0 would be $0 \leq c$. Thus, $\text{cost}_0(\pi) \geq T/2$ and by definition of NE, $\text{cost}_1(\pi) \leq T/2(2n - 1)$. Let a, b such that $\text{cost}_0(\pi) = a$ and $\text{cost}_1(\pi) = nT - b$, clearly we have $a + b = T$ by construction, and $a \geq T/2$ and $b \geq T/2$ by hypothesis, which means that $a = b = T/2$. ◀

The next result generalizes a result from [7], where the authors showed the coNP-completeness for the (U)NCNV problem when the weights on the edges are all equal to 1. Having integer weights encoding in binary induces a new difficulty: we cannot characterize σ_0 -fixed NE outcomes by using polynomial-size lassos. Indeed, Example 6, used with PO rationality, is also applicable in the context of NE rationality, with one-player environments.

To prove the result, we will guess a succinct representation of a solution π of exponential size as we did in Section 4 thanks to Parikh automata. We will not dive into all tricky technical details and stick to an intuition based on the lasso-sufficiency result of such a solution as presented in [7].

► **Theorem 23.** *The (Universal) Non-Cooperative Nash Verification problem for reachability games is coNP-complete.*


Proof (sketch). The lower bound is already proved in from [7]. Let us consider the upper bound. As for other verification problems, we use the complementary problem and show that the co(U)NCNV problem belongs to NP. We suppose in the following that we already have a game \mathcal{G} which is the product of the given game and the (non)deterministic Mealy machine of player 0.

The main goal is to guess a play π outcome of a σ_0 -fixed NE such that $\text{cost}_0(\pi) > c$. By [7], we deduce that it suffices to guess a lasso $\pi = \mu(\nu)^\omega$ such that $\text{cost}_i(\pi) \in \{0, \dots, (2t + 1)|V|W, +\infty\}$ for every player i . We use again Parikh automata to guess such a lasso in polynomial time (by using markers and portions as in the proofs of Section 4.4).

We need two kinds of markers. The first kind of markers are vertices that aim to represent the first occurrence of a target set along π (including T_0 if π visits T_0). To verify that π is a σ_0 -fixed NE, we also need markers that are vertices with a finite value, with the aim that every time $\pi_m \in V_i$ is a marker with $\text{Val}^*(\pi_m) < +\infty$, we must have $\text{cost}_i(\pi_{\geq m}) \leq \text{Val}^*(\pi_m)$ (see Proposition 20). The total number of markers is polynomial as it is bounded by $|\mathcal{P}| + |V|$.¹³

The algorithm works as follows. First, it computes in polynomial time the value of each vertex. Then, it guesses whether the lasso will visit T_0 or not, and guess its markers as explained above. For each portion between any two consecutive markers, it also guesses a tuple of weights in $\{0, \dots, (2t + 1)|V|W, +\infty\}$ that aim to represent the player weights for this portion. Finally, the algorithm performs a series of checks in polynomial time: It verifies that the markers are vertices with finite values or belonging to target sets (including T_0 if it

¹³ Notice that, as in Section 4.4, we also need markers for the initial vertex and the first vertex of the cycle ν .



■ **Figure 14** Reduction from the subset-sum game problem to the NCNS problem (one-player env.).

guessed a visit to T_0). It verifies the existence of the portions with the guessed weight tuples (excluding the visit to certain vertices to remain consistent with the markers). It finally checks that the characterization of Proposition 20 holds and that the cost for player 0 is at least c in case of a visit to T_0 . ◀

F Complexity of the NCNS Problem with One-Player Environments

This section aims at proving Theorem 24, i.e., showing that the NCNS problem is PSPACE-hard and in EXPTIME when the environment is composed of only one player, player 1 (Theorem 3.d with one-player environments). Imposing this restriction drastically simplifies the problem.

► **Theorem 24.** *The NCNS problem with a one-player environment is PSPACE-hard and belongs to EXPTIME.*

F.1 PSPACE-hardness

To show the PSPACE-hardness result stated in Theorem 24, we use a reduction from a problem called the *subset-sum game problem*. An instance of this problem is a formula ψ as

$$\forall P_1 \in \{A_1, B_1\}, \exists P_2 \in \{E_1, F_1\}, \dots, \forall P_{2n-1} \in \{A_n, B_n\}, \exists P_{2n} \in \{E_n, F_n\}, \sum_{i=1}^{2n} P_i = T,$$

where T, A_i, B_i, E_i and F_i are natural integers encoded in binary, for all $i \in \{1, \dots, n\}$. We can view this formula as a game with two players, the existential and the universal players, where the existential player wins if the formula is satisfied, i.e., if the valuations of each picked variable P_i sum up to T . This problem is PSPACE-complete [47].

Notice that we can suppose w.l.o.g. that every integer A_i, B_i, E_i and F_i is $\leq T$. If there exists i such that either $A_i > T$ or $B_i > T$, or $E_i > T$ and $F_i > T$, then the formula is never satisfied. Indeed either the universal player selects a valuation exceeding T for his variable, or the existential player has no choice but to exceed T , and thus $\sum_{i=1}^{2n} P_i > T$. And when $E_i > T$ and $F_i \leq T$ (resp. $E_i \leq T$ and $F_i > T$), the existential player must select F_i (resp. E_i) to hope to win, in which case we modify ψ by replacing E_i by F_i (resp. F_i by E_i).

Proof of Theorem 24 (Hardness). We use a reduction from the subset-sum game problem and construct a game \mathcal{G} as in Figure 14 and set the threshold $c = (2n - 1)T$. Player 0, owning the circle vertices, represents the existential player of the subset-sum game, while player 1, owning the square vertices, represents the universal player. The initial vertex is v_0 and the target sets are $T_0 = \{R\}$ and $T_1 = \{R, L\}$. The two weight functions are indicated on the edges. Notice that each weight is positive or zero, from our previous remark. At the initial vertex, player 1 either chooses the edge towards L and gets a cost of $T + 1$ while imposing an infinite cost to player 0, or he simulates with player 0 a play of the subset-sum game by alternatively picking an integer, until reaching the vertex R .

If the existential player has a strategy to satisfy ψ , then player 0 can simulate this strategy in \mathcal{G} , which is a solution σ_0 to the NCNS problem. Indeed, any play consistent with σ_0 either reaches L with a cost of $T + 1$ for player 1 or reaches R with a cost of T for player 1. So, the σ_0 -fixed NE outcomes are those reaching R , ensuring a cost of $(2n - 1)T = c$ for player 0.

For the other implication, notice that for any play π reaching R , we have $\text{cost}_0(\pi) + \text{cost}_1(\pi) = 2nT$. Let σ_0 be a solution to the NCNS problem, that is, such that the outcome π of every σ_0 -fixed NE satisfies $\text{cost}_0(\pi) \leq (2n - 1)T$. Then, by our remark, $\text{cost}_1(\pi) \geq T$. However, we cannot have $\text{cost}_1(\pi) \geq T + 1$, since otherwise the play π visiting L would be the outcome of a σ_0 -fixed NE with $\text{cost}_0(\pi) = +\infty$, in contradiction with σ_0 being a solution to the NCNS problem. We conclude that $\text{cost}_1(\pi) = T$, and thus $\text{cost}_0(\pi) = (2n - 1)T$, i.e., the existential player can simulate the strategy σ_0 to satisfy the formula ψ . ◀

F.2 EXPTIME-Membership

We now prove the EXPTIME-membership result stated in Theorem 24.

The heart of the decidability of the NCNS problem with player 0, the system, and player 1, the environment, comes with the following result.

► **Lemma 25.** *Let $\sigma_0 \in \Sigma_0$ and $d = \min\{\text{cost}_1(\pi) \mid \pi \text{ play consistent with } \sigma_0\}$. Then for all play π consistent with σ_0 , π is the outcome of a σ_0 -fixed NE if and only if $\text{cost}_1(\pi) = d$.*

Moreover, when $d = +\infty$, every play consistent with σ_0 is a σ_0 -fixed NE.

Proof. Let π be the outcome of a σ_0 -fixed NE. By minimality of d , we have $\text{cost}_1(\pi) \geq d$, and by definition of an NE, $\text{cost}_1(\pi) \leq \text{cost}_1(\pi')$ for all plays π' consistent with σ_0 . In particular, it is also verified for a play π' such that $\text{cost}_1(\pi') = d$. Therefore, we get $\text{cost}_1(\pi) = d$.

Conversely, let π be such that $\text{cost}_1(\pi) = d$. By minimality of d , we have $\text{cost}_1(\pi') \geq \text{cost}_1(\pi)$ for all plays π' consistent with σ_0 , which means that π is the outcome of an NE.

The remark when $d = +\infty$ is a direct consequence of the minimality of d . ◀

Lemma 25 indicates that we can associate a unique minimum $d \in \mathbb{N} \cup \{+\infty\}$ to each strategy σ_0 of player 0. From now on, we will often do this link between such a strategy σ_0 and its minimum cost d for player 1, written explicitly d_{σ_0} when needed.

Another important result is a characterization of solutions to the NCNS problem, thanks to the concept of *witness*. This idea already appears in [25] for mean-payoff games with a one-player environment.

► **Definition 26 (Witness).** *Let $c \in \mathbb{N}$. A c -witness π is a play such that $\text{cost}_0(\pi) \leq c$ and for every deviation¹⁴ hv of π , v is winning for player 0 in the zero-sum game $(\mathcal{A}, \Omega^{(hv)})$ such that*

$$\Omega^{(hv)} = \{\pi' \in \text{Plays}(v) \mid \text{cost}_0(h\pi') \leq c \text{ or } \text{cost}_1(h\pi') > d\}$$

with $d = \text{cost}_1(\pi)$.

In other words, π is a c -witness if $\text{cost}_0(\pi) \leq c$ and when player 1 is deviating from π , player 0 can either ensure that his own cost is smaller than c or punish player 1 by imposing him a cost strictly greater than d .

¹⁴We recall that hv is a deviation of π if h is a prefix of π but not hv .

In other words, π is a c -witness if $\text{cost}_0(\pi) \leq c$ and when player 1 is deviating from π , player 0 can either ensure that his own cost is smaller than c or punish player 1 by imposing him a cost strictly greater than d .¹⁵

► **Lemma 27.** *Let $c \in \mathbb{N}$ be a threshold. Then there exists a solution σ_0 to the NCNS problem with the threshold c if and only if there exists a c -witness.*

Proof. Suppose that there exists a c -witness π . We can construct a strategy σ_0 such that it produces π (i.e., π is consistent with σ_0), and for all deviations hv of π , σ_0 acts as a winning strategy of player 0 in the zero-sum game $(\mathcal{A}, \Omega^{(hv)})$ from the history hv . Let us show that this strategy σ_0 is a solution to the NCNS problem. For each σ_0 -fixed NE (σ_0, σ_1) , we have by definition of NE that $\text{cost}_1(\langle \sigma_0, \sigma_1 \rangle_{v_0}) \leq \text{cost}_1(\pi)$. Since π is a c -witness, it follows that $\text{cost}_0(\langle \sigma_0, \sigma_1 \rangle_{v_0}) \leq c$.

Let us now suppose that there exists a solution σ_0 to the NCNS problem. We extract by Lemma 25 a σ_0 -fixed NE outcome π such that $\text{cost}_0(\pi) = d_{\sigma_0}$ and claim that π is a c -witness. First, notice that $\text{cost}_0(\pi) \leq c$ as σ_0 is solution. Then, for all strategies σ_1 of player 1 such that $\pi' = \langle \sigma_0, \sigma_1 \rangle_{v_0}$ is different from π , we have $\text{cost}_1(\pi') \geq d_{\sigma_0}$ (again by Lemma 25). So either $\text{cost}_1(\pi') > d_{\sigma_0}$ or $\text{cost}_1(\pi') = d_{\sigma_0}$, i.e., σ_1 is a σ_0 -fixed NE, and thus, $\text{cost}_0(\pi') \leq c$ as σ_0 is solution. Thus for any deviation hv of π , σ_0 is a winning strategy for player 0 in the game $(\mathcal{A}, \Omega^{(hv)})$. ◀

Despite this useful characterization, notice that a c -witness is not necessarily the outcome of an NE, because player 1 might have a smaller cost elsewhere, but in that case, we keep a cost of player 0 smaller than c along any other play profitable for player 1.

► **Lemma 28.** *Let $c \in \mathbb{N}$ and let π be a c -witness. Then there exists a c -witness π' such that either $\text{cost}_1(\pi') = +\infty$ or $\text{cost}_1(\pi') \leq 2|V|W$.*

Proof. Let $\pi = \pi_0 \pi_1 \dots$ be a c -witness such that $\text{cost}_1(\pi) = d$. Let $k_i = \inf\{n \in \mathbb{N} \mid \pi_n \in T_i\}$ for $i \in \{0, 1\}$, where $k_0 < +\infty$ by hypothesis. If $\text{cost}_1(\pi) = +\infty$, then $\pi' = \pi$. Otherwise, we have $k_1 < +\infty$.

Suppose first that $k_0 \leq k_1$.

- If there is a cycle $\pi_{[n, m]}$ before k_0 , i.e., $m < k_0$, then we can remove it from π and still keep a c -witness π' . Indeed, $\text{cost}_i(\pi') = \text{cost}_i(\pi) - w_i(\pi_{[n, m]})$, thus $\text{cost}_0(\pi') \leq c$ and $\text{cost}_1(\pi') = d - w_1(\pi_{[n, m]})$. Moreover, consider any deviation hv of π such that h contains the cycle $\pi_{[n, m]}$. Then, from a winning strategy for player 0 from v in $(\mathcal{A}, \Omega^{(hv)})$ with $\Omega^{(hv)} = \{\rho \in \text{Plays}(v) \mid \text{cost}_0(h\rho) \leq c \text{ or } \text{cost}_1(h\rho) > d\}$ and for $h'v$ the deviation of π' obtained by removing $\pi_{[n, m]}$ from h , we get that v is winning in $(\mathcal{A}, \Omega^{(h'v)})$ with $\Omega^{(h'v)} = \{\rho' \in \text{Plays}(v) \mid \text{cost}_0(h'\rho') \leq c - w_0(\pi_{[n, m]}) \text{ or } \text{cost}_1(h'\rho') > d - w_1(\pi_{[n, m]})\}$.
- If there exists a cycle between k_0 and k_1 , we can similarly remove it and again keep a c -witness. In this case, notice that $\Omega^{(hv)}$ is always satisfied as h visits T_0 and thus $\text{cost}_0(h\rho) \leq c$.

Suppose now that $k_1 < k_0$, then we remove cycles before k_1 as we did previously with cycles before k_0 .

In both cases, by repeatedly removing cycles as explained above, we obtain a c -witness π' such that $\text{cost}_1(\pi') \leq 2|V|W$. ◀

¹⁵In the objective Ω^{hv} , we need to subtract the weights $w_0(hv)$ and $w_1(hv)$ as we start to play from v , after history h , in the game $(\mathcal{A}, \Omega^{hv})$.

Witnesses are useful, nevertheless, it would be easier to deal with qualitative objectives instead of quantitative ones. We will show that working with bounded objectives as $\Omega^{(hv)}$ amounts to working with qualitative objectives in a specific arena, called *extended*, where we add accumulated weights in the vertices as well as players who visited their target set. This extended arena is defined for any number t of players in the environment, but used with $t = 1$ in the proof of the EXPTIME membership of Theorem 24.

► **Definition 29 (Extended arena).** Let $\mathcal{G} = (\mathcal{A}, (T_i)_{i \in \mathcal{P}})$ be a reachability game with $\mathcal{A} = (V, E, \mathcal{P}, (V_i)_{i \in \mathcal{P}}, (w_i)_{i \in \mathcal{P}})$ and $B = (B_i)_{i \in \mathcal{P}} \in \mathbb{N}^{t+1}$ be a family of bounds, one for each player. The extended arena \mathcal{A}_B of \mathcal{G} is the tuple $(V_B, E_B, \mathcal{P}, (V_{B,i})_{i \in \mathcal{P}})$, where

- a vertex $v' \in V_B$ is in the form $v' = (v, c_0, \dots, c_t, F)$ with $v \in V$, $c_i \in \{0, 1, \dots, B_i, +\infty\}$ for all $i \in \{0, \dots, t\}$, and $F \subseteq \mathcal{P}$,
- $((v, c_0, \dots, c_t, F), (v', c'_0, \dots, c'_t, F')) \in E_B$ if
 - $(v, v') \in E$,
 - $c_i = \begin{cases} c_i & \text{if } i \in F \text{ or } c_i = +\infty \\ c_i + w_i((v, v')) & \text{if } i \notin F, c_i < +\infty \text{ and } c_i + w_i((v, v')) \leq B_i \\ +\infty & \text{otherwise,} \end{cases}$
 - $F' = F \cup \{i \in \mathcal{P} \mid v' \in T_i\}$,
- $V_{B,i} = \{(v, c_0, \dots, c_t, F) \in V_B \mid v \in V_i\}$ for all $i \in \{0, \dots, t\}$.

Moreover, if v_0 is the initial vertex of \mathcal{A} , then $v'_0 = (v_0, 0, \dots, 0, F)$ is the initial vertex of \mathcal{A}_B with $F = \{i \in \mathcal{P} \mid v_0 \in T_i\}$.

In this definition, the component c_i is the cumulative weight of player i . It is set to $+\infty$ when it exceeds B_i . The set F is the set of all players who visited their target set. When $i \in F$, the component c_i is frozen and no longer changes. Notice that the new arena \mathcal{A}_B is not weighted.

We clearly have a bijection between $\text{Plays}_{\mathcal{A}}(v_0)$ and $\text{Plays}_{\mathcal{A}_B}(v'_0)$. The useful difference is that the extended arena can express bounded objectives from the original game as qualitative objectives in the extended arena, e.g., saying that a play $\pi \in \text{Plays}_{\mathcal{A}}(v_0)$ has $\text{cost}_i(\pi) \leq d$, when $B \geq d$, is equivalent to saying that its corresponding play in $\text{Plays}_{\mathcal{A}_B}(v'_0)$ visits some vertex (v, c_0, \dots, c_t, F) where $c_i \leq d$ and $i \in F$. For a play $\pi \in \text{Plays}_{\mathcal{A}_B}(v'_0)$, we denote $\pi|_V$ the corresponding play in $\text{Plays}_{\mathcal{A}}(v_0)$ by taking its projection on the V -component. We also denote by $|\mathcal{A}_B|$ the size of the extended arena equal to $|V| \cdot 2^{t+1} \cdot \prod_{i \in \mathcal{P}} (B_i + 2)$.

We are now able to prove Theorem 24.


Proof of Theorem 24 (Easiness). By Lemma 27, it is enough to check the existence of a c -witness π in EXPTIME. Moreover, by Lemma 28, we can assume that $\text{cost}_1(\pi) \in \{0, \dots, 2|V|W, +\infty\}$.

We first treat the particular case where there exists a strategy σ_0 for player 0 such that all plays $\rho \in \text{Plays}_{\mathcal{A}}(v_0)$ consistent with σ_0 satisfy $\text{cost}_0(\rho) < c + 1$. The existence of such a strategy (winning in a two-player zero-sum game with a bounded reachability game) can be checked in polynomial time [34].

If this algorithm concludes the nonexistence of such a strategy σ_0 , we know by Lemma 25 that there is no solution σ_0 to the NCNS problem such that $d_{\sigma_0} = +\infty$. In that case, we consider the next second algorithm: Iterate for each $d \in \{0, \dots, 2|V|W\}$ the following steps

1. Compute the extended arena $\mathcal{A}_{(c,d)}$ and build two objectives:

- $\Omega_0 = \{\pi \in \text{Plays}_{\mathcal{A}_{(c,d)}}(v'_0) \mid \pi \text{ visits a state } (v, c_0, c_1, F) \text{ with } c_0 \leq c \text{ and } 0 \in F\}$,
- $\Omega_1 = \{\pi \in \text{Plays}_{\mathcal{A}_{(c,d)}}(v'_0) \mid \pi \text{ visits a state } (v, c_0, c_1, F) \text{ with } c_1 > d\}$.

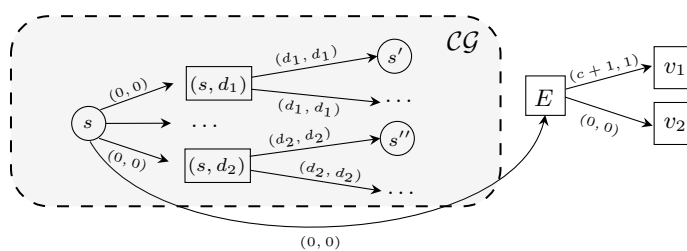

■ **Figure 15** Reduction from countdown games to the NCNS problem with two players and bounded reachability objectives.

2. Consider the zero-sum game $(\mathcal{A}_{(c,d)}, \Omega)$ with $\Omega = \Omega_0 \cup \Omega_1$, and compute the set W_0 of vertices that are winning for player 0 for Ω . As Ω is a (qualitative) reachability game, the set W_0 can be computed in time polynomial in $|\mathcal{A}_{(c,d)}|$ (see e.g. [27]), i.e., in time polynomial in $|V|$ and exponential in c and W since c and W are encoded in binary.
3. Construct the subarena of $\mathcal{A}_{(c,d)}$ restricted to W_0 , and check the existence of a path π (the required c -witness) visiting a vertex (v, c_0, c_1, F) where $c_0 \leq c$ and $0 \in F$ as well as a vertex (v', c'_0, c'_1, F') with $c'_1 = d$ and $1 \in F'$. This can be done by a graph traversal algorithm in time polynomial in $|W_0|$, so in exponential time. If such a path exists, stop the algorithm, otherwise proceed to the next iteration.

This completes the proof since every step is in EXPTIME and there is an exponential number of iterations. ◀

Notice that with a little more work, we could find the smallest threshold c for which there exists a solution σ_0 to the NCNS problem if such a solution exists.

G Variant of the NCNS Problem

To better understand how difficult the NCNS problem is, we look at the variant where the rational NE responses of the multi-player environment aim to ensure costs bounded by a given threshold rather than minimizing these costs. This is a perspective studied in [43] in the case of NEs for discounted-sum objectives. The authors call those objectives *satisficing objectives*, establishing a duality with *optimization objectives*. For some reward functions such as discounted-sum, players might deviate for arbitrarily minuscule rewards. Hence, satisficing objectives prevent this behavior since a player is either happy or unhappy, there is no more optimization.

We prove that, when the players have such bounded reachability objectives, the NCNS problem becomes EXPTIME-complete. This result holds already for a one-player environment.

► **Theorem 11.** *The Non-Cooperative Nash Synthesis problem where the objective of each player $i \in \{1, \dots, t\}$ is a bounded reachability objective $\text{Reach}_{<d_i}(T_i)$ is EXPTIME-complete, and hardness holds even with a one-player environment.*

Proof. For the EXPTIME upper bound, we only give a sketch of the proof. Given an objective $\text{Reach}_{<d_i}(T_i)$ for each player $i \in \{1, \dots, t\}$ and $\text{Reach}_{<c+1}(T_0)$ for player 0, we can construct an adapted version of the Büchi tree automata from [21]. In short, their tree automaton works with qualitative reachability objectives. It guesses at each vertex $v \in V_i$ along a branch whether v is in the winning region of player i , and the move of a winning strategy from

v . Then, it keeps track of deviations in case player i does not follow the guessed winning strategy. The objective of the tree automaton is a Büchi objective verifying whether every guess is done consistently with the infinite branch, i.e., when a player always followed a winning strategy, he actually wins; but it also verifies whether either player 0 visits T_0 or a player i has a profitable deviation, i.e., player i saw the winning region, deviated and loses.

The needed changes to shift to bounded reachability objectives are the extension of the tree automaton with accumulated weights, as it is done for the extended arena defined in Appendix F, to keep track of players who are not able to satisfy their bounded reachability objectives because they exceed their bound d_i . Guesses of winning regions and winning strategies are done as before. Therefore, the constructed tree automaton has an exponential size, and deciding whether a Büchi tree automaton has an empty language can be done in time polynomial in this tree automaton. In other words, our algorithm is in EXPTIME.

The lower bound is obtained by reduction from the countdown game problem to our problem with one player in the environment. Given a countdown game \mathcal{CG} and a threshold c , we build a game \mathcal{G} as illustrated in Figure 15 (where the grey part contains the countdown game), with two players 0 and 1 and where the objective of both players is $\text{Reach}_{<c+1}(\{v_1, v_2\})$. Player 0 owns the circle vertices and can decide to exit the grey part of the figure to go to the vertex E . Player 1 owns the square vertices, in particular E from which he can go either to v_1 or to v_2 . The weight function of each player is indicated on the edges. The initial vertex of \mathcal{G} is the initial vertex of the countdown game.

Suppose first that player 0 has a winning strategy σ_0 in \mathcal{CG} . We can simulate it in \mathcal{G} and make player 0 exit \mathcal{CG} when his cost is exactly c . From E , if player 1 chooses to go to v_1 , then he gets a cost of $c + 1$, and thus his objective $\text{Reach}_{<c+1}(\{v_1, v_2\})$ is not satisfied. Therefore, every σ_0 -fixed NE outcome π necessarily goes to v_2 , and thus we get $\text{cost}_0(\pi) = c$ showing that σ_0 is solution to the modified NCNS problem.

Suppose now that player 0 has no winning strategy in the countdown game. Then, for every strategy σ_0 in \mathcal{CG} , there is a play π consistent with σ_0 that never reaches a cost of exactly c in \mathcal{CG} . Let us consider the possible cases in \mathcal{G} . If π stays forever in \mathcal{CG} , we have $\text{cost}_0(\pi) > c$. If player 0 leaves π to go to E , the current accumulated weight in E is either $k < c$ or $k > c$.

- In $k < c$, going to v_1 or v_2 leads to two σ_0 -fixed NE outcomes, as the objective of player 1 is satisfied in both outcomes. And when going to v_1 , the cost for player 0 is $k + c + 1 > c$.
- If $k > c$, we have again two σ_0 -fixed NE outcomes when going to v_1 or v_2 , but with the objective of player 1 being not satisfied. And for both outcomes, the cost for player 0 is $> c$.

Hence there exists no solution to the modified NCNS problem. ◀